


KTMB | Multi-range cable grommets

for cable diameters 2.5 - 33 mm / IP54 / UL Type 12

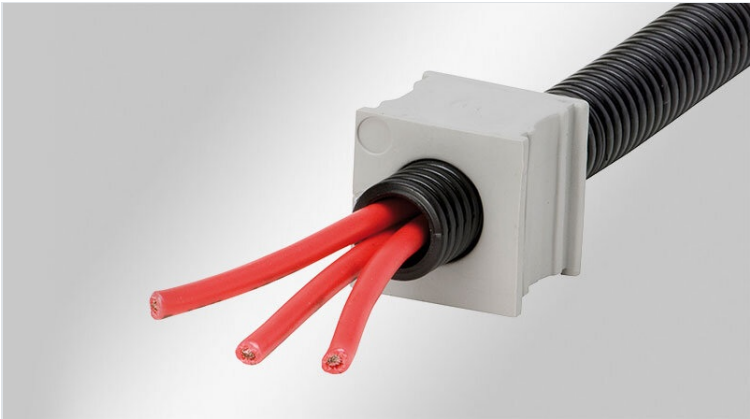

The KTMB grommets accept a wide range of cable diameters. A great benefit when the exact cable diameter is not known in advance.

The KTMB grommets are not split and therefore only usable for cables without connectors.

The model range KTMB small covers a diameter range from 2.5 to 16 mm, the model range KTMB large covers a diameter range from 13 to 33 mm.

IP54

ECOLAB
certified

UL TYPE
12

ISO 4892-2A

CULUS

PNEUMATICS

RIIR

RoHS
compliant

HL3
EN 45545-2

REACH
COMPLIANCE

E45
EI30
EN 45545-3

Made in
Germany

Specifications

IP rating (EN 60529)	IP54
UL Type (UL 50E)	UL Type 12
Material	Elastomer
Flame class	UL94-V0, self-extinguishing
Operating temperature	-40 C° to 100 C°
Properties	silicone free, halogen free


Advantages & benefits

- Ideal for wiring non pre-terminated cables locally
- Easy storage

Product types & sizes

KTMB-A	Part No. EAN Package quantity For max. no. of cables Colour Length Width	41432 4251269307188 10 1 grey (similar RAL 7035) 21 mm 21 mm	Height Mounting height For cable type Clamping range Clamping range	19 mm 2 mm Round cable 2,5 - 6,5 mm 1 x 2.5 - 6.5 mm
KTMB-B	Part No. EAN Package quantity For max. no. of cables Colour Length Width	41434 4251269307195 10 1 grey (similar RAL 7035) 21 mm 21 mm	Height Mounting height For cable type Clamping range Clamping range	19 mm 2 mm Round cable 4 - 7,5 mm 1 x 4 - 7.5 mm


KTMB-C



Part No. **41436**
EAN **4251269307201**
Package quantity **10**
For max. no. of cables **1**
Colour **grey (similar RAL 7035)**
Length **21 mm**
Width **21 mm**

Height
Mounting height **19 mm**
For cable type **2 mm**
Clamping range **Round cable**
Clamping range **6,5 - 10 mm**
Clamping range **1 x 6.5 - 10 mm**


KTMB-D



Part No. **41438**
EAN **4251269307218**
Package quantity **10**
For max. no. of cables **1**
Colour **grey (similar RAL 7035)**
Length **21 mm**
Width **21 mm**

Height
Mounting height **19 mm**
For cable type **2 mm**
Clamping range **Round cable**
Clamping range **9,5 - 13 mm**
Clamping range **1 x 9.5 - 13 mm**


KTMB-E



Part No. **41440**
EAN **4251269307225**
Package quantity **10**
For max. no. of cables **1**
Colour **grey (similar RAL 7035)**
Length **21 mm**
Width **21 mm**

Height
Mounting height **19 mm**
For cable type **2 mm**
Clamping range **Round cable**
Clamping range **13 - 16 mm**
Clamping range **1 x 13 - 16 mm**


KTMB-G



Part No. **41460**
EAN **4251269307232**
Package quantity **10**
For max. no. of cables **1**
Colour **grey (similar RAL 7035)**
Length **41,5 mm**
Width **40,5 mm**

Height
Mounting height **19 mm**
For cable type **2 mm**
Clamping range **Round cable**
Clamping range **13 - 18 mm**
Clamping range **1 x 13 - 18 mm**


KTMB-H



Part No. **41465**
EAN **4251269307249**
Package quantity **10**
For max. no. of cables **1**
Colour **grey (similar RAL 7035)**
Length **41,5 mm**
Width **40,5 mm**

Height
Mounting height **19 mm**
For cable type **2 mm**
Clamping range **Round cable**
Clamping range **18 - 23 mm**
Clamping range **1 x 18 - 23 mm**


KTMB-I



Part No. **41470**
EAN **4251269307256**
Package quantity **10**
For max. no. of cables **1**
Colour **grey (similar RAL 7035)**
Length **41,5 mm**
Width **40,5 mm**


Height
Mounting height **19 mm**
For cable type **2 mm**
Clamping range **Round cable**
Clamping range **23 - 28 mm**
Clamping range **1 x 23 - 28 mm**

KTMB-J



Part No.	41475	Height	19 mm
EAN	4251269307263	Mounting height	2 mm
Package quantity	10	For cable type	Round cable
For max. no. of cables	1	Clamping range	28 - 33 mm
Colour	grey (similar RAL 7035)	Clamping range	1 x 28 - 33 mm
Length	41,5 mm		
Width	40,5 mm		

KTMB-K



Part No.	41480	Height	19 mm
EAN	4251269307270	Mounting height	2 mm
Package quantity	10	For cable type	Round cable
For max. no. of cables	2	Clamping range	2x 13 - 18 mm
Colour	grey (similar RAL 7035)	Clamping range	2 x 13 - 18 mm
Length	41,5 mm		
Width	40,5 mm		