


QT-DT | Multi-membrane cable grommets for QUICK systems

for cable diameters 1 - 12.2 mm / IP54 / UL Type 12

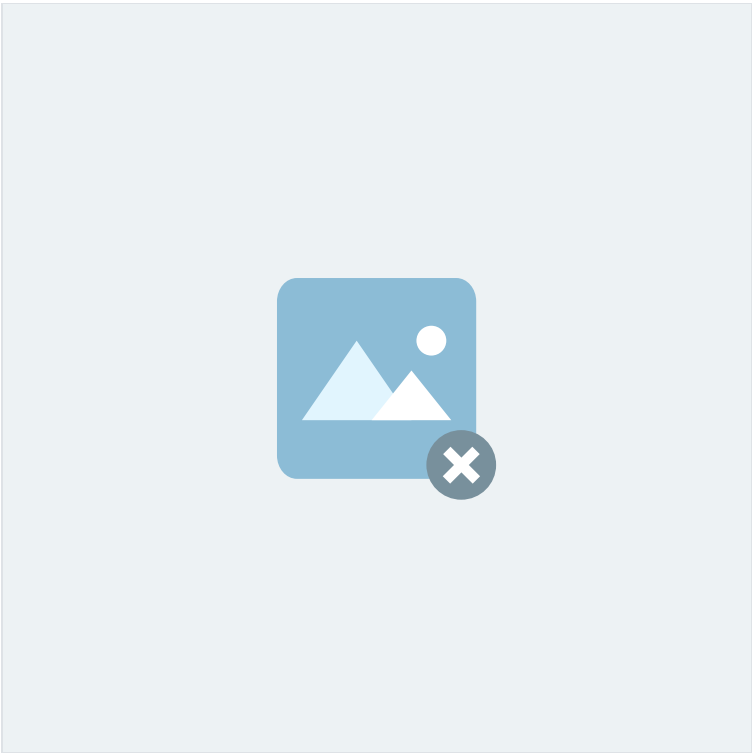

The QT-DT cable grommets can be used anywhere where a large number of electrical, pneumatic or hydraulic lines must be routed and sealed with IP54. By using the QT-DT grommets, the cable density can be significantly increased.

QT-DT grommets are compatible with split icotek cable entry frames [KEL-QUICK](#) and [KEL-QTA](#). The routing of cables with and without preassembled connectors in one cable entry frame can thus be easily combined.

The QT-DT grommets are also perfectly suitable for the assembly of subsequently terminated cable harnesses.

[ST-B Plugs](#) can be used for sealing pierced membranes if cables have been removed.

IP54

UL TYPE 12

RISA

HL3 EN 45545-2

ECOLAB certified

UV ISO 4892-2A

Specifications

IP rating (EN 60529)	IP54
UL Type (UL 50E)	UL Type 12
Material	Elastomer
Flame class	UL94-V0, self-extinguishing
Operating temperature	-40 C° to 100 C°
Properties	silicone free, halogen free


Advantages & benefits

- Routing of cables with and without connectors
- High cable density
- Cost-effective solution
- Enables sub-assembly of cable harnesses

Product types & sizes

QT-DT 1	Part No.	42550	Height	12 mm
	EAN	4251269320576	For cable type	Round cable
	Package quantity	10	Clamping range	4 x 1 - 6,5 mm
	For max. no. of cables	4	Clamping range	4 x 1 - 6.5 mm
	Colour	grey (similar RAL 7035)		
	Length	19 mm		
	Width	20 mm		


QT-DT 2



Part No. **42551**
EAN **4251269320583**
Package quantity **10**
For max. no. of cables **4**
Colour **grey (similar RAL 7035)**
Length **19 mm**
Width **20 mm**

Height **12 mm**
For cable type **Round cable**
Clamping range **2× 1 - 3,5 mm | 2× 1 - 6,5 mm**
Clamping range **2 x 1 - 3.5 mm**
Clamping range **2 x 1 - 6.5 mm**


QT-DT 3



Part No. **42552**
EAN **4251269320590**
Package quantity **10**
For max. no. of cables **9**
Colour **grey (similar RAL 7035)**
Length **19 mm**
Width **20 mm**

Height **12 mm**
For cable type **Round cable**
Clamping range **9× 1 - 3,5 mm**
Clamping range **9 x 1 - 3.5 mm**


QT-DT 8



Part No. **42556**
EAN **4251269322907**
Package quantity **10**
For max. no. of cables **14**
Colour **grey (similar RAL 7035)**
Length **40 mm**
Width **39 mm**

Height **17 mm**
For cable type **Round cable**
Clamping range **12× 1 - 6,5 mm | 2× 1 - 12,2 mm**
Clamping range **12 x 1 - 6.5 mm**
Clamping range **2 x 1 - 12.2 mm**


QT-DT 9



Part No. **42557**
EAN **4251269322914**
Package quantity **10**
For max. no. of cables **15**
Colour **grey (similar RAL 7035)**
Length **40 mm**
Width **39 mm**

Height **17 mm**
For cable type **Round cable**
Clamping range **15× 1 - 7,1 mm**
Clamping range **15 x 1 - 7.1 mm**


QT-DT 10



Part No. **42558**
EAN **4251269322921**
Package quantity **10**
For max. no. of cables **10**
Colour **grey (similar RAL 7035)**
Length **40 mm**
Width **39 mm**


Height **17 mm**
For cable type **Round cable**
Clamping range **4× 1 - 6,5 mm | 3× 1 - 9,5 mm | 3× 1 - 11,3 mm**
Clamping range **4 x 1 - 6.5 mm**
Clamping range **3 x 1 - 9.5 mm**
Clamping range **3 x 1 - 11.3 mm**

QT-DT 11



Part No. **42559**
EAN **4251269322938**
Package quantity **10**
For max. no. of cables **9**
Colour **grey (similar RAL 7035)**
Length **40 mm**
Width **39 mm**

Height **17 mm**
For cable type **Round cable**
Clamping range **9× 1 - 9,5 mm**
Clamping range **9 x 1 - 9.5 mm**



Part No.	42560	Height	17 mm
EAN	4251269322945	For cable type	Round cable
Package quantity	10	Clamping range	1× 1 - 9,5 mm 4× 1 - 14,5 mm
For max. no. of cables	5	Clamping range	mm
Colour	grey (similar RAL 7035)		1 x 1 - 9.5 mm
Length	40 mm		4 x 1 - 14.5 mm
Width	39 mm		