


KEL-ULTRA flex | Pyramid cable entry grommets

for single cables with diameters up to 115 mm / IP66 / UL Type 12

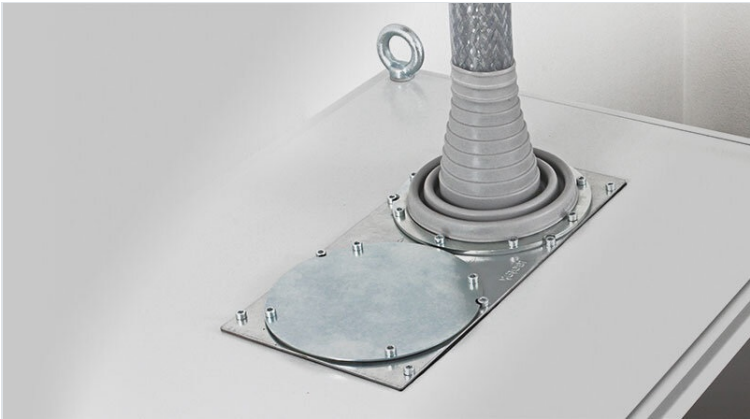

The KEL-ULTRA flex is designed as a cable entry grommet for any large cable or conduit that is difficult to manage. The KEL-ULTRA flex comes in two sizes and is ideal for routing and sealing cables and conduits with a diameter from 25 to 115 mm. Due to the high flexibility of the elastomer pyramid, inserting large, thick cables with KEL-ULTRA flex is easier than using standard cable glands.

After inserting the cable or conduit, the KEL-ULTRA flex is quickly and easily mounted with the metal ring and screws. This ring enables a circular fixing and sealing of the grommet at the enclosure wall. The ring is supplied with each KEL-ULTRA flex.

It is recommended that additional strain relief be provided for cables using cable ties.

Cutting of grommets: Cable diameter less 25%. The corresponding diameters are marked on the grommet.

IP54

RoHS compliant

IP55

REACH COMPLIANCE

IP64

Made in Germany

IP65

IP66

UL TYPE 12

Specifications


IP rating (EN 60529)	IP54, IP55, IP64, IP65, IP66
UL Type (UL 50E)	UL Type 12
Material	Elastomer Fixing ring: Stainless steel
Flame class	UL94-V0, self-extinguishing
Operating temperature	-40 C° to 100 C°
Properties	silicone free, halogen free
Mounting options	Screw type mounting

Advantages & benefits

- It is possible to install rigid cables at angles
- Certified protection IP66 (acc. to EN 60529)

Product types & sizes


KEL-ULTRA flex 1



Part No.	42630
EAN	4251269309052
Package quantity	1
For max. no. of cables	1
Max. cable diameter	90 mm
Height	175,5 mm
Mounting height	175,5 mm

External diameter	168 mm
Cut-out size, round	140 mm
No. of screw holes	8
Diam. of screw holes	5,5 mm
Clamping range	25 - 90 mm
Clamping range	1 x 25 - 90 mm

KEL-ULTRA flex 2



Part No.	42631
EAN	4251269309069
Package quantity	1
For max. no. of cables	1
Max. cable diameter	115 mm
Height	175,5 mm
Mounting height	175,5 mm

External diameter	168 mm
Cut-out size, round	140 mm
No. of screw holes	8
Diam. of screw holes	5,5 mm
Clamping range	75 - 115 mm
Clamping range	1 x 75 - 115 mm

