


TPS Door operated switch

suitable for ALLIO and ALU-LINE series

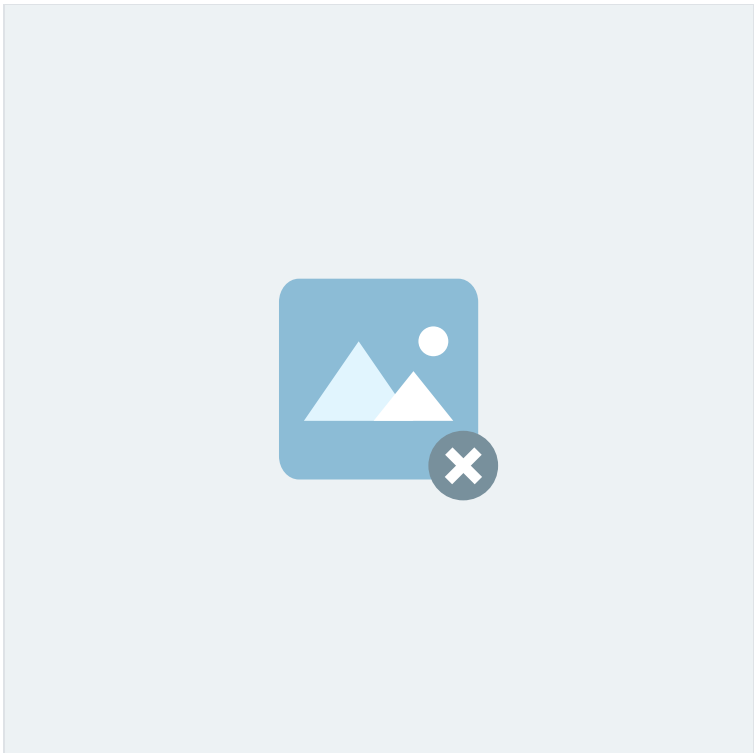

The TPS door operated switch was specially developed for use in control panels and 19" server racks. This switch makes it possible to monitor the status of the cabinet door and automatically switch the cabinet luminaires on or off when the door is opened or closed. Thus the service life of the luminaires can be extended.

The door position switch is simply mounted via screws. Various adapters serve as mounting aids on numerous frame profiles from different cabinet manufacturers.

The TPS is available with two cable lengths (0.6 m or 1.5 m) and C18 connectors (angled or straight) for the ALU-LINE and ALLIO series.

IP20

Made in Germany

CE

UK CA

RoHS compliant

REACH COMPLIANCE

Specifications

IP rating (EN 60529)	IP20
Material	Polyamide
Flame class	
Operating temperature	-20 C° to 50 C°
Mounting options	Screw type mounting

Advantages & benefits

- Easy adjustment
- Flat, space-saving design
- Reliable, direct switching
- Integrated cable routing
- Assembly on surfaces and profiles of various manufacturers
- Snap-on assembly aid on profiles
- Also suitable for exterior doors
- With connecting cable and straight or angled connector
- Adapters for enclosures from Rittal, Hofmann, Eldon and Triton as well as for assembly on surfaces are included in the scope of delivery

Product types & sizes

Door operated switch, 600 mm

Part No.	81132
EAN	4251269333071
Package quantity	1
UL Certificate	-
Length	85,2 mm
Height	24 mm
Width	63,2 mm

Length connecting cable	600 mm
Connector type	C8 connector
Rated current	2,5 A
Colour	black

Door operated switch,
600 mm

	Part No.	81334	Length connecting cable	600 mm
	EAN	4251269333002	Connector type	C8 connector, angled
	Package quantity	1	Rated current	2,5 A
	UL Certificate	-	Colour	black
	Length	85,2 mm		
	Height	24 mm		
	Width	63,2 mm		

Door operated switch,
1500 mm

	Part No.	81133	Length connecting cable	1.500 mm
	EAN	4251269333088	Connector type	C8 connector
	Package quantity	1	Rated current	2,5 A
	UL Certificate	-	Colour	black
	Length	85,2 mm		
	Height	24 mm		
	Width	63,2 mm		

Door operated switch,
1500 mm

	Part No.	81333	Length connecting cable	1.500 mm
	EAN	4251269332999	Connector type	C8 connector, angled
	Package quantity	1	Rated current	2,5 A
	UL Certificate	-	Colour	black
	Length	85,2 mm		
	Height	24 mm		
	Width	63,2 mm		