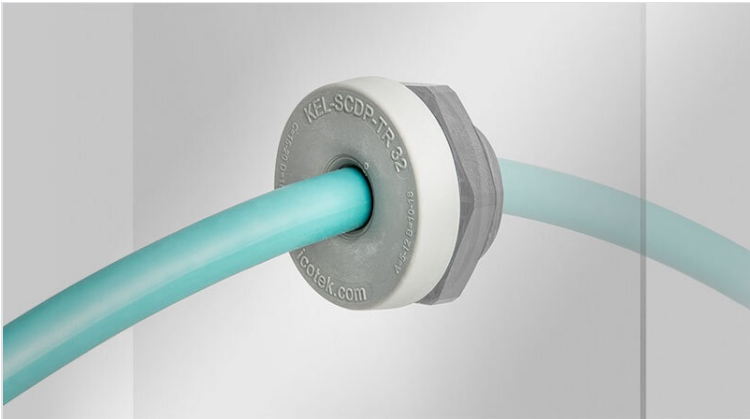


KEL-SCDP-TR | Multi-range cable entry grommets

with metric threads M25 - M63, for single cables with diameters up to 52 mm / IP65



With the KEL-SCDP-TR cable entry grommet, single unterminated cables, hoses and conduits can be routed and sealed at a rating of IP65. Its unique advantage is the large sealing range.

The single circular membrane can be peeled away to accommodate the specific diameter of the cable or hose. For this purpose, only a small hole between the rings needs to be pierced. Then the corresponding ring can be removed. The peeled-off area is always round, ensuring a secure seal around cable/hose.

Peeling of circular membranes: Cable diameter less 15-25%. The corresponding diameters are marked on the cable entry.

The KEL-SCDP-TR grommets have a thread to fit in metric cut-outs from M25 to M63. Thus cut-outs for metric cable glands can be used. Hexagonal locknuts are included in the delivery.

IP54

RoHS compliant

IP55

REACH COMPLIANCE

IP64

Made in Germany

IP65

CE

ECOLAB certified

UV

ISO 4892-2A

Specifications


IP rating (EN 60529)	IP54, IP55, IP64, IP65
Material	Elastomer Base frame: Polyamide
Operating temperature	-40 C° to 100 C°
Properties	silicone free, halogen free
Mounting options	Fasten with locknut

Advantages & Benefits

- Perfect edge protection and sealing (IP65)
- Circular membranes can be peeled off easily
- Quick assembly without tools
- Suitable for metric cut-outs
- Hexagonal locknut included in the delivery

Product Types & Sizes

KEL-SCDP-TR 25



Part No.	44070
EAN	85472000
Package quantity	10
For max. no. of cables	1
Max. cable diameter	17 mm
Height	22 mm
Mounting height	8 mm


External diameter	39 mm
Cut-out size, round	25,3 mm
Cut-out size, metric	M25
Thread	M25 x 1,5
Thread length	14 mm
Clamping range	1 x 5 - 17 mm

KEL-SCDP-TR 32



Part No.	44071
EAN	4251269328954
Package quantity	10
For max. no. of cables	1
Max. cable diameter	23 mm
Height	22 mm
Mounting height	8 mm

External diameter	44 mm
Cut-out size, round	32,3 mm
Cut-out size, metric	M32
Thread	M32 x 1,5
Thread length	14 mm
Clamping range	1 x 5 - 23 mm


KEL-SCDP-TR 40

Part No.
EAN
Package quantity
For max. no. of cables
Max. cable diameter
Height
Mounting height

44072
4251269328961
10
1
28 mm
22 mm
8 mm

External diameter
Cut-out size, round
Cut-out size, metric
Thread
Thread length
Clamping range

52 mm
40,4 mm
M40
M40 × 1,5
14 mm
1 x 8 - 28 mm


KEL-SCDP-TR 50

Part No.
EAN
Package quantity
For max. no. of cables
Max. cable diameter
Height
Mounting height

44073
4251269328978
10
1
38 mm
22 mm
8 mm

External diameter
Cut-out size, round
Cut-out size, metric
Thread
Thread length
Clamping range

62 mm
50,4 mm
M50
M50 × 1,5
14 mm
1 x 8 - 38 mm


KEL-SCDP-TR 63|1

Part No.
EAN
Package quantity
For max. no. of cables
Max. cable diameter
Height
Mounting height

44074
4251269328985
10
1
52 mm
22 mm
8 mm

External diameter
Cut-out size, round
Cut-out size, metric
Thread
Thread length
Clamping range

75 mm
63,4 mm
M63
M63 × 1,5
14 mm
1 x 8 - 52 mm

KEL-SCDP-TR 63|5+1

Part No.
EAN
Package quantity
For max. no. of cables
Max. cable diameter
Height
Mounting height

44078
4251269328992
10
5
52 mm
22 mm
8 mm

External diameter
Cut-out size, round
Cut-out size, metric
Thread
Thread length
Clamping range

75 mm
63,4 mm
M63
M63 × 1,5
14 mm
5 x 5 - 13 mm
1 x 50 - 52 mm