


KEL-ULTRA flex | Pyramid cable entry grommets

for single cables with diameters up to 115 mm / IP66 / UL Type 12

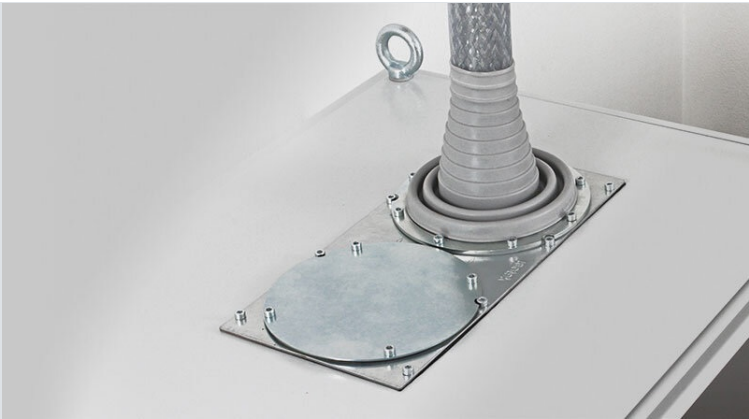

The KEL-ULTRA flex is designed as a cable entry grommet for any large cable or conduit that is difficult to manage. The KEL-ULTRA flex comes in two sizes and is ideal for routing and sealing cables and conduits with a diameter from 25 to 115 mm. Due to the high flexibility of the elastomer pyramid, inserting large, thick cables with KEL-ULTRA flex is easier than using standard cable glands.

After inserting the cable or conduit, the KEL-ULTRA flex is quickly and easily mounted with the metal ring and screws. This ring enables a circular fixing and sealing of the grommet at the enclosure wall. The ring is supplied with each KEL-ULTRA flex.

It is recommended that additional strain relief be provided for cables using cable ties.

Cutting of grommets: Cable diameter less 25%. The corresponding diameters are marked on the grommet.

IP54



RoHS compliant

IP55



REACH COMPLIANCE

IP64



Made in Germany

IP65



IP66



UL TYPE 12



ISO 4892-2A

Specifications

IP rating (EN 60529)	IP54, IP55, IP64, IP65, IP66
UL Type (UL 50E)	UL Type 12
Material	Elastomer Fixing ring: Stainless steel
Flame class	UL94-V0, self-extinguishing
Operating temperature	-40 C° to 100 C°
Properties	silicone free, halogen free
Mounting options	Screw type mounting

Advantages & Benefits

- It is possible to install rigid cables at angles
- Certified protection IP66 (acc. to EN 60529)

Product Types & Sizes

KEL-ULTRA flex 1



Part No.	42630
EAN	4251269309052
Package quantity	1
For max. no. of cables	1
Max. cable diameter	90 mm
Height	175,5 mm
Mounting height	175,5 mm

External diameter	168 mm
Cut-out size, round	140 mm
No. of screw holes	8
Diam. of screw holes	5,5 mm
Clamping range	25 - 90 mm
Clamping range	1 x 25 - 90 mm

KEL-ULTRA flex 2



Part No.	42631
EAN	4251269309069
Package quantity	1
For max. no. of cables	1
Max. cable diameter	115 mm
Height	175,5 mm
Mounting height	175,5 mm

External diameter	168 mm
Cut-out size, round	140 mm
No. of screw holes	8
Diam. of screw holes	5,5 mm
Clamping range	75 - 115 mm
Clamping range	1 x 75 - 115 mm

