

IT 產品 LED



IP20

Made in
Germany

UK
CA

IK07

IK08

RoHS
compliant


[illegible]

IP 等级 (EN 60529)	IP20
尺寸	H(高度) 100mm
	重量 约 100g Enclosure: 塑料外壳
	-20 C° to 50 C°
材料	ABS 塑料, 黑色 粉末涂层 (RAL 7001)


100

- 190° 회전 LED 디자인
- 회전 각도: 0°, 0° 회전 19" 회전 회전 회전
- 회전 회전 회전 회전
- 1050회전 회전 LED
- 회전 회전 회전 회전
- 회전 회전 회전 회전


☐ ☐ ☐ ☐ ☐ ☐ ☐

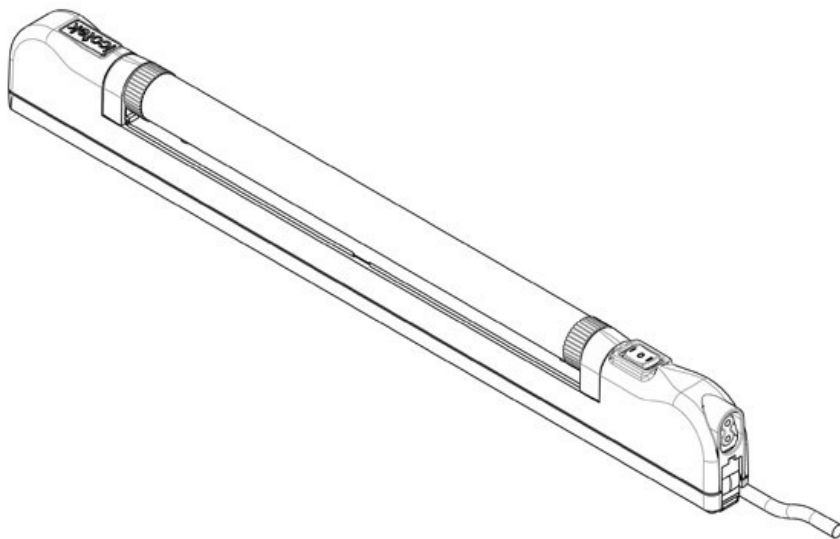


	81100		3.000 mm
EAN	4251269333		Standard
	019	궂궂 가궂궂	궂궂 궂궂 궂궂
	1	궂궂 궂궂	
UL궂궂궂	-	궂궂 궂궂	8 W
	448 mm	궂궂 궂궂	24 V DC
	56,5 mm	궂궂궂 궂궂	EN 60598, EN
	26,2 mm		55015, EN
			61000, EN
			62741
		가궂궂궂궂궂	2014/35/EU,
			2014/30/EU
			50.000 h
			E
			5.600 K
		궂궂 궂궂궂 궂궂궂 CRI	> 80
		궂궂 W	1.000 lm
			궂궂(RAL 7035 궂 궂)

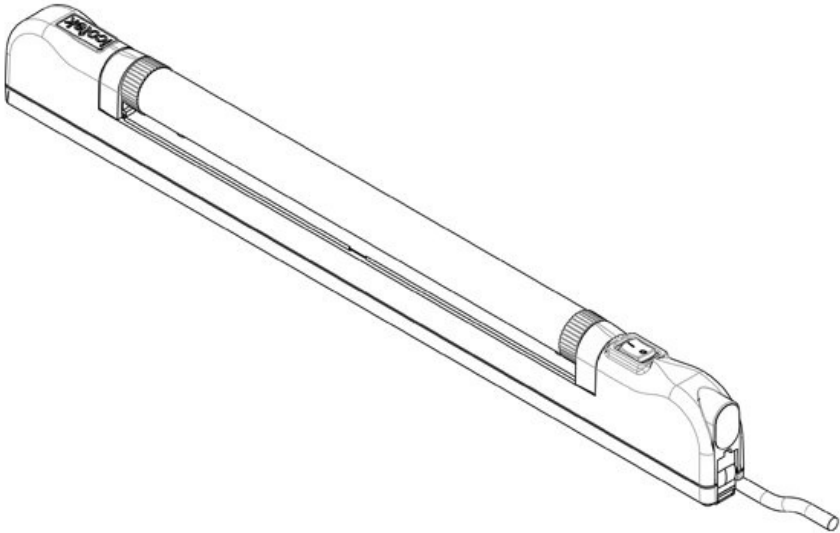


EAN	81101	00 00 000	3.000 mm
	4251269333		PIR 00 000
UL000	026	000 00	
	1	00 00	8 W
	-	00 00	24 V DC
	448 mm	000 00	EN 60598, EN 55015, EN 61000, EN 62741
	56,5 mm		2014/35/EU, 2014/30/EU
	26,2 mm	가0000	50.000 h
			E
			5.600 K
		00 000 000 CRI	> 80
		00 W	1.000 lm
			00(RAL 70350 (0))

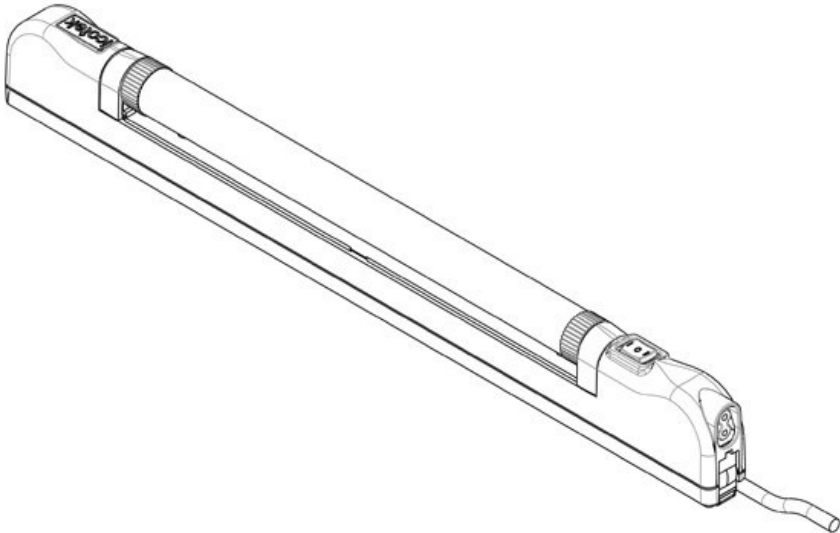

EAN	81102	00 00 000	3.000 mm
	4251269333		Standard
UL000	033	00 가00	00 00 000
	1	000 00	
	-	00 00	8 W
	448 mm	00 00	220 - 240 V
	56,5 mm		AC, 50 - 60 Hz
	26,2 mm	000 00	EN 60598, EN 55015, EN 61000, EN 62741
		가00000	2014/35/EU, 2014/30/EU
			50.000 h
			E
			5.600 K
		00 000 000 CRI	> 80
		00 W	1.000 lm
			00(RAL 70350 (0))

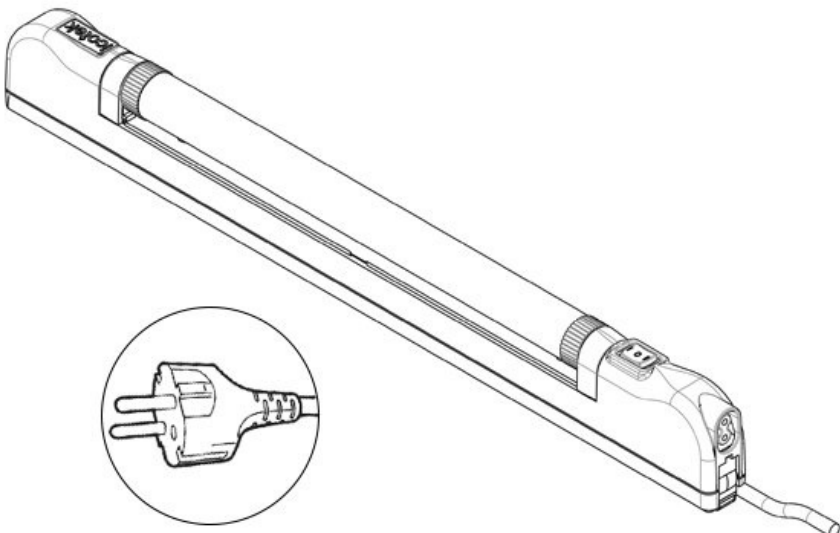

EAN	81103	00 00 000	1.500 mm
	4251269333		Standard
UL000	040	00 가00	00 00 000
	1	000 00	000 CEE 7/17
	-	00 00	8 W
	448 mm	00 00	220 - 240 V
	56,5 mm		AC, 50 - 60 Hz
	26,2 mm	000 00	EN 60598, EN 55015, EN 61000, EN 62741
		가00000	2014/35/EU, 2014/30/EU
			50.000 h
			E
			5.600 K
		00 000 000 CRI	> 80
		00 W	1.000 lm
			00(RAL 70350 (0))

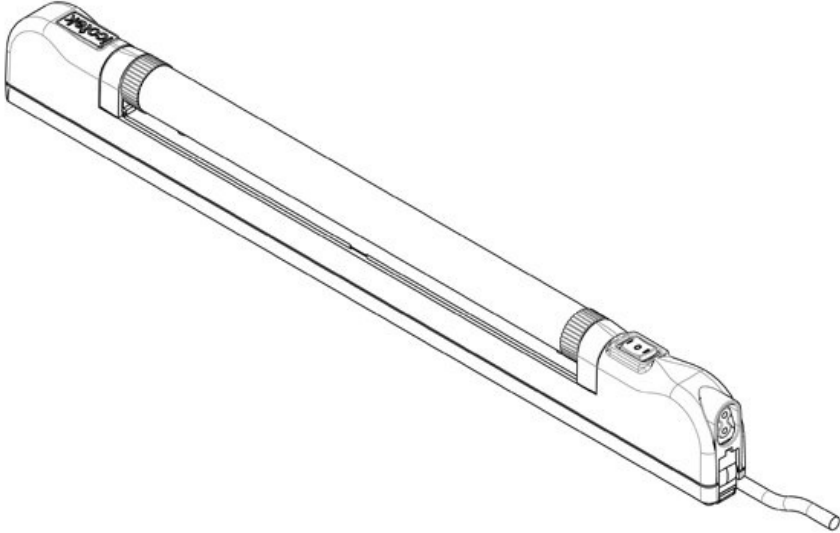

EAN


81104
4251269333
057
1
-
448 mm
56,5 mm
26,2 mm

UL

가
UL
가

3.000 mm
Standard
가
8 W
100 - 240 V
AC, 50 - 60
Hz
EN 60598, EN
55015, EN
61000, EN
62741
2014/35/EU,
2014/30/EU
50.000 h
E
5.600 K
CRI > 80
1.000 lm
(RAL 7035
)

ALLIO 100-240 V AC (가)

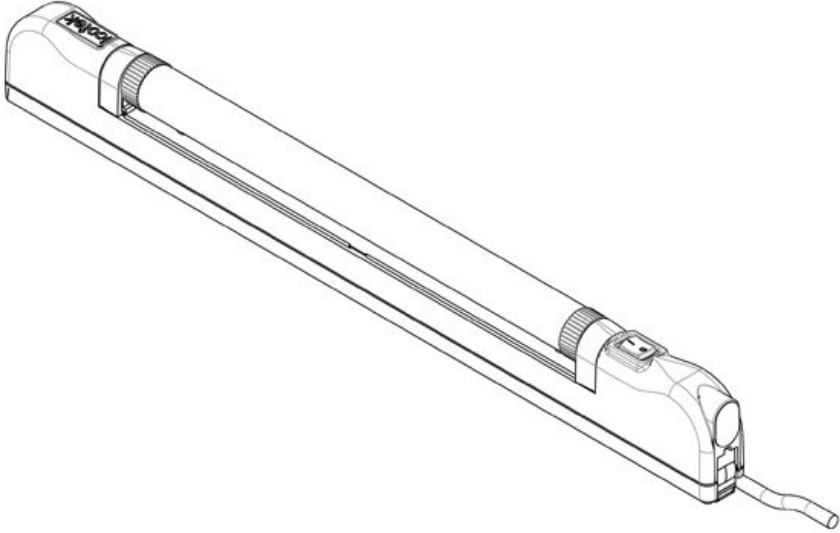

EAN

81105
4251269333
064
1
-
448 mm
56,5 mm
26,2 mm

UL

가
UL
가

3.000 mm
PIR 가
8 W
100 - 240 V
AC, 50 - 60
Hz
EN 60598, EN
55015, EN
61000, EN
62741
2014/35/EU,
2014/30/EU
50.000 h
E
5.600 K
CRI > 80
1.000 lm
(RAL 7035
)

19" 가 bk



EAN


81135
4251269333
101
1
484 mm
6 mm
44 mm

가

가

4
6,5 mm

19" 柜 柜 柜 柜 gy



EAN

81134
4251269333095
1
484 mm
6 mm
44 mm
柜 (RAL 7035 柜 柜)

柜 柜 柜
柜 柜 柜

4
6,5 mm