


KEL-QTA | 0000 0000 0000 0000 0000

000가 000 0000, 0000 00가 / IP54

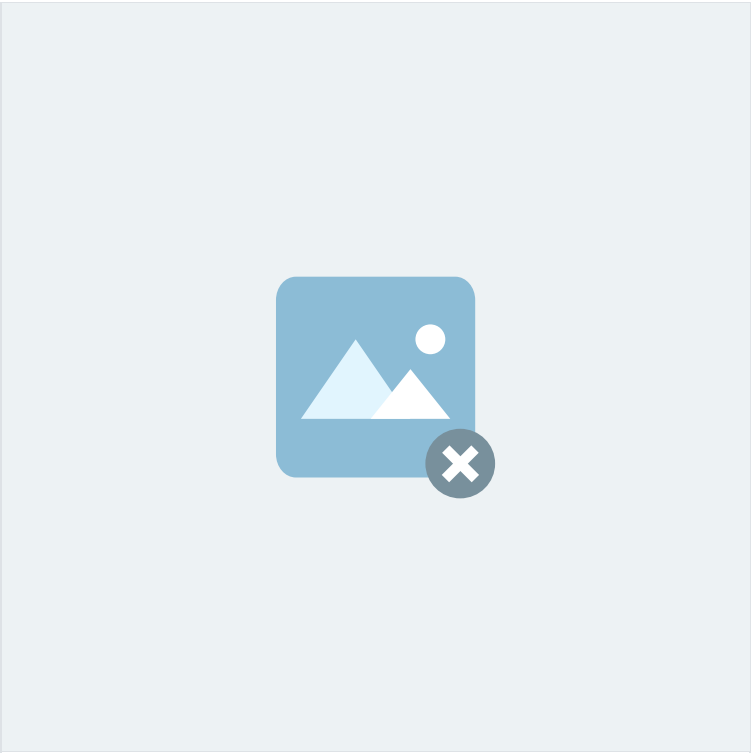

KEL-QTE 000가 000 000, 00 000, 00, 00 00 00 00 00 0 0 0000.

KEL-QTE 00000 00 20mm 000.

IP54

HL3
EN 45545-2

ECOLAB
certified

UV
ISO 4892-2A

Made in
Germany

RoHS
compliant

REACH
COMPLIANCE

UL
US


IP 0000 (EN 60529)	IP54
	00000
	UL94-V0, 00000
	-40 C° to 100 C°
	UV-00, 000 00, 00000
00 00	00-0
00 00	2 mm

00 0 00

- 0000 00 00
- 000가 000 000 0 00000 00 가
- KEL 0000 0000 00 00 00 0 0 000
- 00 000 000000 00

00 00 0 00

	EAN	43412 4251269309793
	0000 0	10
	00 0000 00 (0000 00 0000)	2
	00 0000 00 (00 0000)	3,2 mm
		5,2 mm
		6 mm
	00 00	2 mm
	00 0 00	1,5 mm
	00 0 00	2,5 mm
	00 0000 00 (0000 00 0000)	2,6 mm
	00 0000 00 (00 0000)	1 mm




EAN

0000 0
00 0000 00 (0000 00 00000)
00 0000 00 (00 00000)

00 00
00 0 00
00 0 00
00 0000 00 (0000 00 00000)
00 0000 00 (00 00000)

43413
4251269309809
10
2
3,8 mm
5,2 mm
6 mm
2 mm
1,5 mm
2,5 mm
3,1 mm
1 mm




EAN

0000 0
00 0000 00 (0000 00 00000)
00 0000 00 (00 00000)

00 00
00 0 00
00 0 00
00 0000 00 (0000 00 00000)
00 0000 00 (00 00000)

43414
4251269309816
10
2
4,8 mm
5,2 mm
6 mm
2 mm
1,5 mm
2,5 mm
3,8 mm
1 mm



EAN

0000 0
00 0000 00 (0000 00 00000)
00 0000 00 (00 00000)

00 00
00 0 00
00 0 00
00 0000 00 (0000 00 00000)
00 0000 00 (00 00000)

43415
4251269309823
10
2
5,6 mm
5,2 mm
6 mm
2 mm
1,5 mm
2,5 mm
4,7 mm
1 mm