


□□□□ □□ □□ 115 mm □□ □□ 가□ / IP66 / IP68 / UL Type 12



○○○○○○○ ㄱ아 ㅁㅁ ㅁㅁ ○○○○○○.

KEL-ULTRA flex 0000 00 0000 0000 **25%** 00 00 000000. 0000 000 0000 0000.

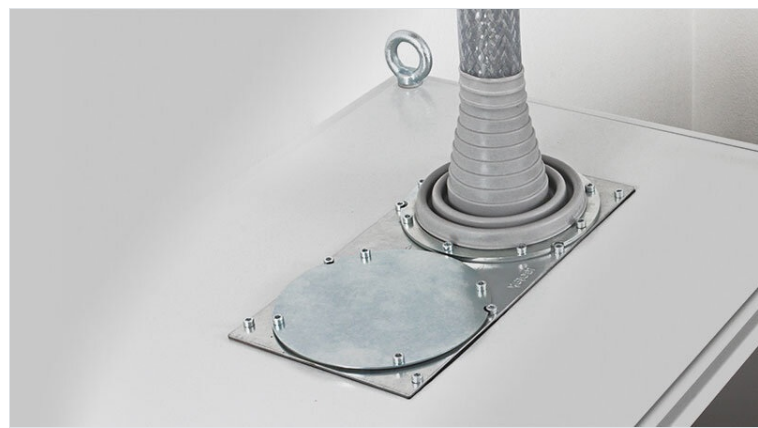

☐ 000 0000 0000 00 0 0 00

■ IP66 対応(EN 60529 対応)

IP	IP54, IP55, IP64, IP65, IP66
UL Type	UL Type 12
	UL94-V0,
	-40 C° to 100 C°

□□ □□ □ □□

	EAN	42630	00 000	168 mm
		4251269309052	00 00 000	140 mm
	000 0	1	00 0 0	8
	00 000 00	1	000 00	5,5 mm
		90 mm	000 00 0	25 - 90 mm
	175,5 mm	000 00 0	1 x 25 - 90 mm	
	175,5 mm			

	EAN	42631 4251269309069	1 1 115 mm 175,5 mm 175,5 mm	168 mm 140 mm 8 5,5 mm 75 - 115 mm 1 x 75 - 115 mm

