


QTMB | 14 - 29 mm (QUICK)

14 - 29 mm / IP54

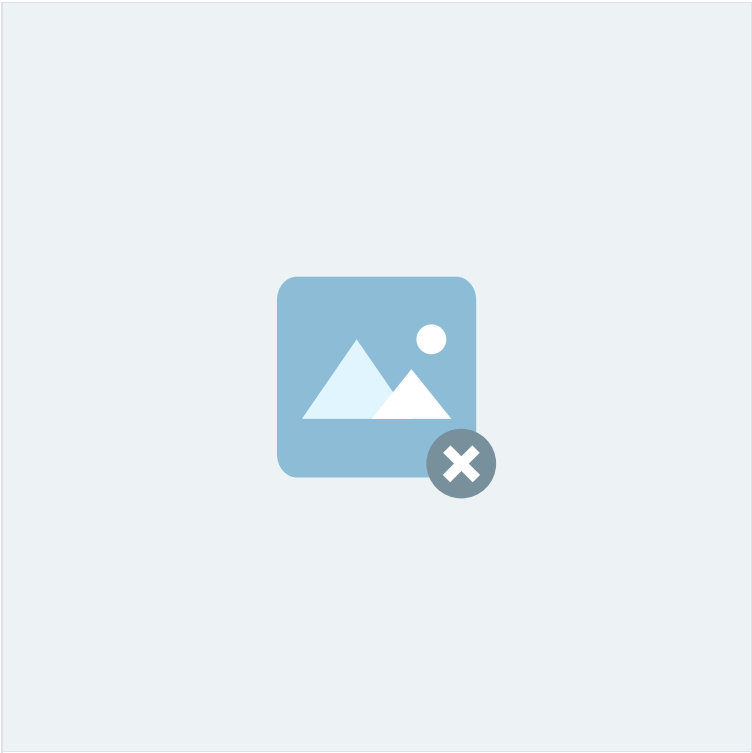

QTMB is a quick-mounting system.

QTMB is a quick-mounting system with a thickness of 3mm.

IP54

RoHS compliant

UL TYPE 12

REACH COMPLIANCE

HL3 EN 45545-2

Made in Germany

ECOLAB certified

CALUS


UV ISO 4892-2A

PNEUMATICS

Features

- Quick-mounting system
- Thickness: 14 - 29 mm
- IP54 protection class
- UL Type 12
- RoHS compliant
- REACH compliant
- Made in Germany
- ECOLAB certified
- UV ISO 4892-2A
- Pneumatics


14 - 29 mm



EAN

42545
4251269321634
10
(RAL 7035)
40 mm
39 mm
17 mm

2 mm
1




EAN

□□□ □

42515
4251269321603
10
1
□□(RAL 7035□ □□)
40 mm
39 mm

□□ □□
□□□ □□
□□□ □□ □
□□□ □□ □

17 mm
2 mm
□□ □□□
14 - 17 mm
1 x 14 - 17 mm




EAN

□□□ □

42516
4251269321986
10
1
□□(RAL 7035□ □□)
40 mm
39 mm

□□ □□
□□□ □□
□□□ □□ □
□□□ □□ □

17 mm
2 mm
□□ □□□
16 - 19 mm
1 x 16 - 19 mm




EAN

□□□ □

42517
4251269321610
10
1
□□(RAL 7035□ □□)
40 mm
39 mm

□□ □□
□□□ □□
□□□ □□ □
□□□ □□ □

17 mm
2 mm
□□ □□□
18 - 21 mm
1 x 18 - 21 mm




EAN

□□□ □

42518
4251269321627
10
1
□□(RAL 7035□ □□)
40 mm
39 mm

□□ □□
□□□ □□
□□□ □□ □
□□□ □□ □

17 mm
2 mm
□□ □□□
20 - 23 mm
1 x 20 - 23 mm




EAN

□□□ □

42519
4251269322723
10
1
□□(RAL 7035□ □□)
40 mm
39 mm

□□ □□
□□□ □□
□□□ □□ □
□□□ □□ □

17 mm
2 mm
□□ □□□
22 - 25 mm
1 x 22 - 25 mm




EAN

□□□ □

42520
4251269322730
10
1
□□(RAL 7035□ □□)
40 mm
39 mm

□□ □□
□□□ □□
□□□ □□ □
□□□ □□ □

17 mm
2 mm
□□ □□□
24 - 27 mm
1 x 24 - 27 mm



EAN

□□□ □

42521
4251269322747
10
1
□□(RAL 7035□ □□)
40 mm
39 mm

□□ □□
□□□ □□
□□□ □□ □
□□□ □□ □

17 mm
2 mm
□□ □□□
26 - 29 mm
1 x 26 - 29 mm

