


00 00 00 00000 가 00 00 / IP67

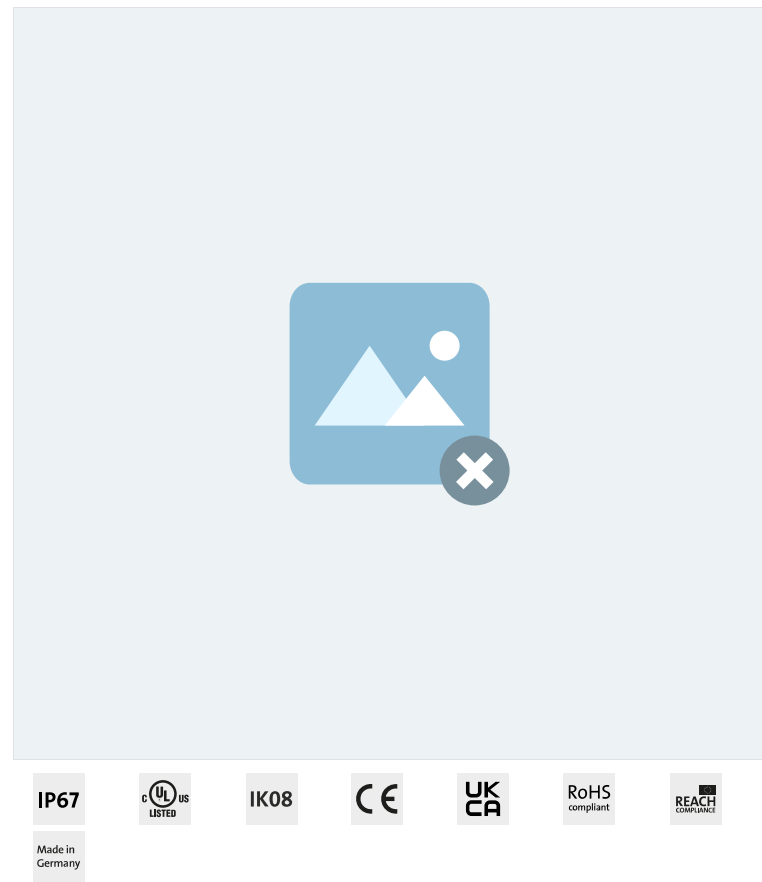

TUBE 0000 000000 00000 0000 00 M12 00000 00 00 0 0000 00000 0000 0000000. 0 000000 0000 00000 0000 가0000 €

በህግ ስር የሚገኝ ስርዓት: **TUBE** የሚለው ስርዓት በህግ የተገለጸ ስርዓት ነው፡፡
በህግ ስር, ስር, ስር የሚለው ስርዓት በህግ የተገለጸ ስርዓት ነው፡፡

TUBE 란 흰색(WHITE), RGB, RGW 란 빨간색, 파란색, 노란색. TUBE RGB 란 빨간색, 파란색, 노란색, RGB 란 빨간색, 파란색, 노란색, 가라 (빨간색, 파란색, 노란색)는 각각 빨간색, 파란색, 노란색. TUBE SC(빨간색, 파란색, 노란색)는 각각 빨간색, 파란색, 노란색.

මම මගේ මම මම මම මම මම මම, මම මම මම. මම මම මම මම. මම මම මම මම.

IP 等级 (EN 60529)	IP67
防水等级	III(可潜水)
	可在 0~10m 水深 使用 100% 时间 可连续使用
	-20 C° to 50 C°
工作温度	0-40

☐ ☐ ☐ ☐ ☐

- 모든 조명은 100% 밝은 밝기로 작동합니다.
- 모든 조명 IP67
- 모든 조명이 100% 밝은 밝기로 작동합니다.
- 모든 조명 LED 조명 조명 조명 조명
- 모든 조명 조명 조명 조명 ø 28mm 조명 조명 조명 조명
- 모든 조명 조명 조명 조명
- 360° 조명 조명
- RGB 조명 RGW 조명 조명 조명 조명 조명 조명 조명 조명
- 조명 조명(조명조명) 조명 조명 (SC 조명)
- 조명 조명 조명 조명 조명
- M12 조명 조명 조명 조명 조명

□ □ □ □ □

	EAN	81550 4251269338960 1 360 mm 301 mm M12 1/2 M12 1/2	200 mm 200 mm 200 mm 200 mm CRI 200 W 200 mm 200 mm	7 W 24 V DC (±5%), UL Class 2 60.000 h 5.700 K >80 1.210 lm
	EAN	81554 4251269338991 1 360 mm 301 mm M12 1/2 M12 1/2	200 mm 200 mm 200 mm 200 mm CRI 200 W 200 mm 200 mm	7 W 24 V DC (±5%), UL Class 2 60.000 h 5.700 K >80 1.210 lm 200 mm

	EAN	81551 4251269338977 1 640 mm 581 mm M12 M12	 CRI W 	14 W 24 V DC (±5%), UL Class 2 60.000 h 5.700 K >80 2.420 lm
	EAN	81555 4251269339004 1 640 mm 581 mm M12 M12	 CRI W 	14 W 24 V DC (±5%), UL Class 2 60.000 h 5.700 K >80 2.420 lm
	EAN	81553 4251269338984 1 1.200 mm 1.142 mm M12 M12	 CRI W 	28 W 24 V DC (±5%), UL Class 2 60.000 h 5.700 K >80 4.840 lm
	EAN	81560 4251269339011 1 370 mm 301 mm M12 , M12	 CRI W 	7 W 24 V DC (±5%), UL Class 2 60.000 h 5.700 K >80 1.210 lm
	EAN	81564 4251269339042 1 370 mm 301 mm M12 , M12	 CRI W 	7 W 24 V DC (±5%), UL Class 2 60.000 h 5.700 K >80 1.210 lm
	EAN	81561 4251269339028 1 650 mm 581 mm M12 , M12	 CRI W 	14 W 24 V DC (±5%), UL Class 2 60.000 h 5.700 K >80 2.420 lm
	EAN	81565 4251269339059 1 650 mm 581 mm M12 , M12	 CRI W 	14 W 24 V DC (±5%), UL Class 2 60.000 h 5.700 K >80 2.420 lm

	EAN	81563 4251269339035 1 1.210 mm 1.142 mm M12 □□□, □□ □□□□ M12 □□□ □□	□□ □□ □□ □□ □□ □□□ □□□ CRI □□ W □□ □□ □□ □□	28 W 24 V DC (±5%), UL Class 2 60.000 h 5.700 K >80 4.840 lm
	□□ L1 □□ L2 □□ 74□□ □□□□ □□			
	EAN	81572 4251269339080 1 360 mm 301 mm M12 □□□□ M12 □□□□ □□	□□ □□ □□ □□ □□ □□□ □□□ CRI □□ R □□ G □□ B □□ □□ □□ □□	7 W 24 V DC (±5%), UL Class 2 60.000 h >80 168 lm 267 lm 173 lm □□□□ □□
	□□ L1 □□ L2 □□ 74□□ □□□□ □□			
	EAN	81571 4251269339073 1 640 mm 581 mm M12 □□□□ M12 □□□□ □□	□□ □□ □□ □□ □□ □□□ □□□ CRI □□ R □□ G □□ B □□ □□ □□ □□	14 W 24 V DC (±5%), UL Class 2 60.000 h >80 336 lm 534 lm 267 lm
	□□ L1 □□ L2 □□ 74□□ □□□□ □□			
	EAN	81570 4251269339066 1 360 mm 301 mm M12 □□□□ M12 □□□□ □□	□□ □□ □□ □□ □□ □□□ □□□ CRI □□ R □□ G □□ B □□ □□ □□ □□	7 W 24 V DC (±5%), UL Class 2 60.000 h >80 168 lm 267 lm 173 lm
	□□ L1 □□ L2 □□ 74□□ □□□□ □□			
	EAN	81575 4251269339097 1 370 mm 301 mm M12 □□□□, □□ □□□□ M12 □□□□ □□	□□ □□ □□ □□ □□ □□□ □□□ CRI □□ R □□ G □□ B □□ □□ □□ □□	7 W 24 V DC (±5%), UL Class 2 60.000 h >80 168 lm 267 lm 173 lm
	□□ L1 □□ L2 □□ 74□□ □□□□ □□			
	EAN	81577 4251269339110 1 370 mm 301 mm M12 □□□□, □□ □□□□ M12 □□□□ □□	□□ □□ □□ □□ □□ □□□ □□□ CRI □□ R □□ G □□ B □□ □□ □□ □□	7 W 24 V DC (±5%), UL Class 2 60.000 h >80 168 lm 267 lm 173 lm □□□□ □□
	□□ L1 □□ L2 □□ 74□□ □□□□ □□			
	EAN	81576 4251269339103 1 650 mm 581 mm M12 □□□□, □□ □□□□ M12 □□□□ □□	□□ □□ □□ □□ □□ □□□ □□□ CRI □□ R □□ G □□ B □□ □□ □□ □□	14 W 24 V DC (±5%), UL Class 2 60.000 h >80 336 lm 534 lm 267 lm
	□□ L1 □□ L2 □□ 74□□ □□□□ □□			

	EAN	81580 4251269339127 1 360 mm 301 mm M12 M12	 CRI R G W 	7 W 24 V DC (±5%), UL Class 2 60.000 h >80 214 lm 645 lm 1.210 lm
	L1 L2 가 			

	EAN	81582 4251269339141 1 360 mm 301 mm M12 M12	 CRI R G W 	7 W 24 V DC (±5%), UL Class 2 60.000 h >80 214 lm 645 lm 1.210 lm
	L1 L2 가 			

	EAN	81581 4251269339134 1 640 mm 581 mm M12 M12	 CRI R G W 	14 W 24 V DC (±5%), UL Class 2 60.000 h >80 430 lm 1.290 lm 2.420 lm
	L1 L2 가 			

	EAN	81583 4251269339158 1 640 mm 581 mm M12 M12	 CRI R G W 	14 W 24 V DC (±5%), UL Class 2 60.000 h >80 430 lm 1.290 lm 2.420 lm
	L1 L2 가 			

	EAN	81585 4251269339165 1 370 mm 301 mm M12 , M12	 CRI R G W 	7 W 24 V DC (±5%), UL Class 2 60.000 h >80 214 lm 645 lm 1.210 lm
	L1 L2 가 			

	EAN	81587 4251269339189 1 370 mm 301 mm M12 , M12	 CRI R G W 	7 W 24 V DC (±5%), UL Class 2 60.000 h >80 214 lm 645 lm 1.210 lm
	L1 L2 가 			

	EAN	81586 4251269339172 1 650 mm 581 mm M12 , M12	 CRI R G W 	14 W 24 V DC (±5%), UL Class 2 60.000 h >80 430 lm 1.290 lm 2.420 lm
	L1 L2 가 			

	EAN	81588 4251269339196 1 650 mm 581 mm M12 3000, 00 0000 M12 0000 00	00 00 00 00 00 0000 0000 CRI 00 R 00 G 00 W 00 00 00 00	14 W 24 V DC (±5%), UL Class 2 60.000 h >80 430 lm 1.290 lm 2.420 lm 0000 00
	00 L1 00 L2 00 7400 0000 00			

	EAN	81589 4251269339202 1 1.210 mm 1.142 mm M12 3000, 00 0000 M12 0000 00	00 00 00 00 00 0000 0000 CRI 00 R 00 G 00 W 00 00 00 00	28 W 24 V DC (±5%), UL Class 2 60.000 h >80 860 lm 2.580 lm 4.840 lm
	00 L1 00 L2 00 7400 0000 00			

00 0000 **TUBE, 5000 mm**

	EAN	81530 4251269333163 1 5.000 mm M12 3000, 0000 24 V DC ±5%	0000 00 00	
	00 00 0000 0000 00 00 00			

00 0000 **TUBE SC (00 00), 5000 mm**

	EAN	81590 4251269333163 1 5.000 mm M12_Steckverbinder_f M12 3000, 0000	0000 00 00	
	00 00 0000 0000 00			

00 0000 **TUBE, 10000 mm**

	EAN	81531 4251269333170 1 10.000 mm M12 3000, 0000 24 V DC ±5%	0000 00 00	
	00 00 0000 0000 00 00 00			

00 0000 **TUBE SC (00 00), 10000 mm**

	EAN	81591 4251269333170 1 10.000 mm M12_Steckverbinder_f M12 3000, 0000	0000 00 00	
	00 00 0000 0000 00			

icotech 81595 TUBE SC (M12 2000 mm), 2000 mm


EAN

icotech 81595

icotech 81595

81595
4251269339493
1
2.000 mm
M12_Steckverbinder_mf
M12 2000

icotech 81595



icotech 91443 TUBE, 30 mm, 38 mm, 27 mm

EAN



91443
4251269335082
2
30 mm
38 mm
27 mm

icotech 91443

1
6,5 mm

icotech 91070 TUBE, 18,4 mm, 34 mm, 28 mm

EAN



icotech 91070

91070
1
18,4 mm
34 mm
34 mm
28 mm

icotech 91070

1
4,2 mm