


# KEL-DPZ CR multi-membrane cable entry plates

for the use in cleanrooms / up to IP66 / UL Type 12



IP54

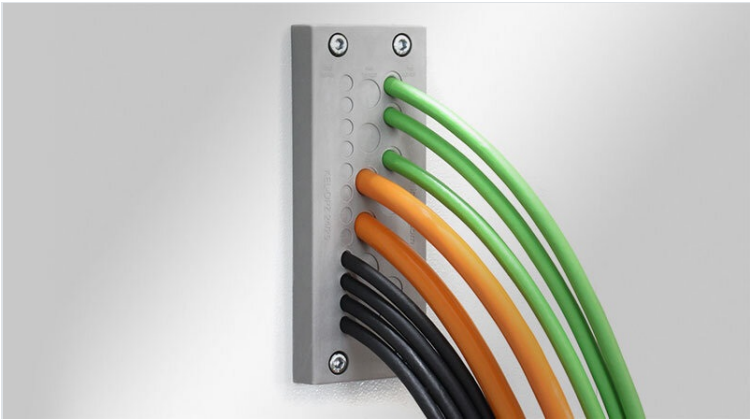



IP55





IP64





IP65



RoHS compliant

IP66





UL TYPE 12



Made in Germany

KEL-DPZ CR cable entry plates are designed to route and seal a large number cables without connectors, hoses or fibre optics (from 1.5 mm to 22 mm in diameter) in limited space.

The KEL-DPZ CR products are a cost and time saving alternative to traditional cable glands.

The assembly of the KEL-DPZ CR with cables or pneumatic hoses can be done quick and easy. Simply make a small hole in the thin membrane, push the cables through. The KEL-DPZ CR provides strain relief and protection up to IP66 / UL type 12.

The KEL-DPZ CR matches exactly the cut-out dimensions of 6-, 16- and 24-pin standard industrial connectors. The size KEL-DPZ-B CR fits on cut-outs 46 × 46 mm. The very compact size KEL-DPZ-E CR is designed for routing cables in very small space. Through a cut-out of only 18 × 112 mm, up to 21 cables can be easily routed and sealed.

Especially for Rittal KL / KX terminal boxes the size KEL-DPZ-KX/KL CR (IP65) was created. It was designed for routing up to 72 cables through the pre-cut standard cut-out. The self-tapping screws required for assembly are included in the scope of delivery.

**The products with article ending .600 are tested and certified for particle emission for cleanroom class 1 according to ISO 14644-1. The materials used for these products have been tested and certified for outgassing according to VOC/SVOC (ISO 14644-8; ISO 16000-6,-9,-11,-25, VDI 2083 sheet 17).**

**The products with the article ending .601 are tested and certified for particle emission for cleanroom class 1 according to ISO 14644-1.**


## Specifications


|                       |                                                                         |
|-----------------------|-------------------------------------------------------------------------|
| IP rating (EN 60529)  | IP54, IP55, IP64, IP65, IP66                                            |
| UL Type (UL 50E)      | UL Type 12                                                              |
| Material              | Elastomer<br>Base frame: Polyamide<br>Base frame: Stainless steel (V2A) |
| Flame class           | UL94-V0, self-extinguishing                                             |
| Operating temperature | -40 C° to 100 C°                                                        |
| Properties            | silicone free, halogen free                                             |
| Mounting options      | Screw type mounting                                                     |

## Advantages & Benefits

- Fast mounting
- High cable density
- Certified protection up to IP66 (acc. to EN 60529)
- Automatic sealing and strain relief for the cable
- Hygienic design - free of dirt-collecting recesses
- Space-saving shape

## Product Types & Sizes

|                                                                                    |                        |                                |                      |                                                   |
|------------------------------------------------------------------------------------|------------------------|--------------------------------|----------------------|---------------------------------------------------|
| <b>KEL-DPZ 24 14 CR gy</b>                                                         |                        |                                |                      |                                                   |
|  | Part No.               | <b>43700.601</b>               | Width                | <b>58 mm</b>                                      |
|                                                                                    | EAN                    | <b>4251269327315</b>           | Height               | <b>14 mm</b>                                      |
|                                                                                    | Package quantity       | <b>5</b>                       | Mounting height      | <b>14 mm</b>                                      |
|                                                                                    | For max. no. of cables | <b>14</b>                      | Cut-out size         | <b>112 × 36 mm</b>                                |
|                                                                                    | Max. cable diameter    | <b>22 mm</b>                   | No. of screw holes   | <b>4</b>                                          |
|                                                                                    | Color                  | <b>gray (similar RAL 7035)</b> | Diam. of screw holes | <b>5,9 mm</b>                                     |
|                                                                                    | Length                 | <b>147 mm</b>                  | (S)VOC tested        | <b>No</b>                                         |
|                                                                                    |                        |                                | Clamping range       | <b>10 x 3.2 - 6.5 mm</b><br><b>4 x 16 - 22 mm</b> |



Part No.  
EAN  
Package quantity  
For max. no. of cables  
Max. cable diameter  
Color  
Length

**43700.600**  
**4251269327148**  
**5**  
**14**  
**22 mm**  
**gray (similar RAL 7035)**  
**147 mm**

Width  
Height  
Mounting height  
Cut-out size  
No. of screw holes  
Diam. of screw holes  
(S)VOC tested  
Clamping range

**58 mm**  
**14 mm**  
**14 mm**  
**112 × 36 mm**  
**4**  
**5,9 mm**  
**ja**  
**10 x 3.2 - 6.5 mm**  
**4 x 16 - 22 mm**



Part No.  
EAN  
Package quantity  
For max. no. of cables  
Max. cable diameter  
Color  
Length

**50700.601**  
**4251269327407**  
**5**  
**14**  
**22 mm**  
**black**  
**147 mm**

Width  
Height  
Mounting height  
Cut-out size  
No. of screw holes  
Diam. of screw holes  
(S)VOC tested  
Clamping range

**58 mm**  
**14 mm**  
**14 mm**  
**112 × 36 mm**  
**4**  
**5,9 mm**  
**No**  
**10 x 3.2 - 6.5 mm**  
**4 x 16 - 22 mm**




Part No.  
EAN  
Package quantity  
For max. no. of cables  
Max. cable diameter  
Color  
Length

**50700.600**  
**4251269327223**  
**5**  
**14**  
**22 mm**  
**black**  
**147 mm**

Width  
Height  
Mounting height  
Cut-out size  
No. of screw holes  
Diam. of screw holes  
(S)VOC tested  
Clamping range

**58 mm**  
**14 mm**  
**14 mm**  
**112 × 36 mm**  
**4**  
**5,9 mm**  
**ja**  
**10 x 3.2 - 6.5 mm**  
**4 x 16 - 22 mm**




Part No.  
EAN  
Package quantity  
For max. no. of cables  
Max. cable diameter  
Color  
Length

**43720.601**  
**4251269327360**  
**5**  
**15**  
**12 mm**  
**gray (similar RAL 7035)**  
**147 mm**

Width  
Height  
Mounting height  
Cut-out size  
No. of screw holes  
Diam. of screw holes  
(S)VOC tested  
Clamping range

**58 mm**  
**14 mm**  
**14 mm**  
**112 × 36 mm**  
**4**  
**5,9 mm**  
**No**  
**15 x 7.5 - 12 mm**




Part No.  
EAN  
Package quantity  
For max. no. of cables  
Max. cable diameter  
Color  
Length

**43720.600**  
**4251269327186**  
**5**  
**15**  
**12 mm**  
**gray (similar RAL 7035)**  
**147 mm**

Width  
Height  
Mounting height  
Cut-out size  
No. of screw holes  
Diam. of screw holes  
(S)VOC tested  
Clamping range

**58 mm**  
**14 mm**  
**14 mm**  
**112 × 36 mm**  
**4**  
**5,9 mm**  
**ja**  
**15 x 7.5 - 12 mm**




Part No.  
EAN  
Package quantity  
For max. no. of cables  
Max. cable diameter  
Color  
Length

**50720.600**  
**4251269327278**  
**5**  
**15**  
**12 mm**  
**black**  
**147 mm**

Width  
Height  
Mounting height  
Cut-out size  
No. of screw holes  
Diam. of screw holes  
(S)VOC tested  
Clamping range


**58 mm**  
**14 mm**  
**14 mm**  
**112 × 36 mm**  
**4**  
**5,9 mm**  
**ja**  
**15 x 7.5 - 12 mm**

KEL-DPZ 24|15 CR bk




|                        |               |                      |                  |
|------------------------|---------------|----------------------|------------------|
| Part No.               | 50720.601     | Width                | 58 mm            |
| EAN                    | 4251269327452 | Height               | 14 mm            |
| Package quantity       | 5             | Mounting height      | 14 mm            |
| For max. no. of cables | 15            | Cut-out size         | 112 × 36 mm      |
| Max. cable diameter    | 12 mm         | No. of screw holes   | 4                |
| Color                  | black         | Diam. of screw holes | 5,9 mm           |
| Length                 | 147 mm        | (S)VOC tested        | No               |
|                        |               | Clamping range       | 15 x 7.5 - 12 mm |

KEL-DPZ 24|16 CR gy



|                        |                         |                      |                                                                         |
|------------------------|-------------------------|----------------------|-------------------------------------------------------------------------|
| Part No.               | 43725.601               | Width                | 58 mm                                                                   |
| EAN                    | 4251269327377           | Height               | 14 mm                                                                   |
| Package quantity       | 5                       | Mounting height      | 14 mm                                                                   |
| For max. no. of cables | 16                      | Cut-out size         | 112 × 36 mm                                                             |
| Max. cable diameter    | 22 mm                   | No. of screw holes   | 4                                                                       |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 5,9 mm                                                                  |
| Length                 | 147 mm                  | (S)VOC tested        | No                                                                      |
|                        |                         | Clamping range       | 8 x 3.2 - 6.5 mm<br>4 x 5 - 9.7 mm<br>2 x 9 - 16.2 mm<br>2 x 16 - 22 mm |

KEL-DPZ 24|16 CR (S)VOC gy




|                        |                         |                      |                                                                         |
|------------------------|-------------------------|----------------------|-------------------------------------------------------------------------|
| Part No.               | 43725.600               | Width                | 58 mm                                                                   |
| EAN                    | 4251269327193           | Height               | 14 mm                                                                   |
| Package quantity       | 5                       | Mounting height      | 14 mm                                                                   |
| For max. no. of cables | 16                      | Cut-out size         | 112 × 36 mm                                                             |
| Max. cable diameter    | 22 mm                   | No. of screw holes   | 4                                                                       |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 5,9 mm                                                                  |
| Length                 | 147 mm                  | (S)VOC tested        | ja                                                                      |
|                        |                         | Clamping range       | 8 x 3.2 - 6.5 mm<br>4 x 5 - 9.7 mm<br>2 x 9 - 16.2 mm<br>2 x 16 - 22 mm |

KEL-DPZ 24|16 CR (S)VOC bk




|                        |               |                      |                                                                         |
|------------------------|---------------|----------------------|-------------------------------------------------------------------------|
| Part No.               | 50725.600     | Width                | 58 mm                                                                   |
| EAN                    | 4251269327285 | Height               | 14 mm                                                                   |
| Package quantity       | 5             | Mounting height      | 14 mm                                                                   |
| For max. no. of cables | 16            | Cut-out size         | 112 × 36 mm                                                             |
| Max. cable diameter    | 22 mm         | No. of screw holes   | 4                                                                       |
| Color                  | black         | Diam. of screw holes | 5,9 mm                                                                  |
| Length                 | 147 mm        | (S)VOC tested        | ja                                                                      |
|                        |               | Clamping range       | 8 x 3.2 - 6.5 mm<br>4 x 5 - 9.7 mm<br>2 x 9 - 16.2 mm<br>2 x 16 - 22 mm |

KEL-DPZ 24|16 CR bk




|                        |               |                      |                                                                         |
|------------------------|---------------|----------------------|-------------------------------------------------------------------------|
| Part No.               | 50725.601     | Width                | 58 mm                                                                   |
| EAN                    | 4251269327469 | Height               | 14 mm                                                                   |
| Package quantity       | 5             | Mounting height      | 14 mm                                                                   |
| For max. no. of cables | 16            | Cut-out size         | 112 × 36 mm                                                             |
| Max. cable diameter    | 22 mm         | No. of screw holes   | 4                                                                       |
| Color                  | black         | Diam. of screw holes | 5,9 mm                                                                  |
| Length                 | 147 mm        | (S)VOC tested        | No                                                                      |
|                        |               | Clamping range       | 8 x 3.2 - 6.5 mm<br>4 x 5 - 9.7 mm<br>2 x 9 - 16.2 mm<br>2 x 16 - 22 mm |

KEL-DPZ 24|17 CR  
(S)VOC gy




|                        |                         |                      |                  |
|------------------------|-------------------------|----------------------|------------------|
| Part No.               | 43705.600               | Width                | 58 mm            |
| EAN                    | 4251269325458           | Height               | 14 mm            |
| Package quantity       | 5                       | Mounting height      | 14 mm            |
| For max. no. of cables | 17                      | Cut-out size         | 112 × 36 mm      |
| Max. cable diameter    | 16,2 mm                 | No. of screw holes   | 4                |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 5,9 mm           |
| Length                 | 147 mm                  | (S)VOC tested        | ja               |
|                        |                         | Clamping range       | 6 x 3.2 - 6.5 mm |
|                        |                         |                      | 6 x 5 - 10.2 mm  |
|                        |                         |                      | 5 x 9 - 16.2 mm  |

KEL-DPZ 24|17 CR gy




|                        |                         |                      |                  |
|------------------------|-------------------------|----------------------|------------------|
| Part No.               | 43705.601               | Width                | 58 mm            |
| EAN                    | 4251269327322           | Height               | 14 mm            |
| Package quantity       | 5                       | Mounting height      | 14 mm            |
| For max. no. of cables | 17                      | Cut-out size         | 112 × 36 mm      |
| Max. cable diameter    | 16,2 mm                 | No. of screw holes   | 4                |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 5,9 mm           |
| Length                 | 147 mm                  | (S)VOC tested        | No               |
|                        |                         | Clamping range       | 6 x 3.2 - 6.5 mm |
|                        |                         |                      | 6 x 5 - 10.2 mm  |
|                        |                         |                      | 5 x 9 - 16.2 mm  |

KEL-DPZ 24|17 CR bk




|                        |               |                      |                  |
|------------------------|---------------|----------------------|------------------|
| Part No.               | 50705.601     | Width                | 58 mm            |
| EAN                    | 4251269327414 | Height               | 14 mm            |
| Package quantity       | 5             | Mounting height      | 14 mm            |
| For max. no. of cables | 17            | Cut-out size         | 112 × 36 mm      |
| Max. cable diameter    | 16,2 mm       | No. of screw holes   | 4                |
| Color                  | black         | Diam. of screw holes | 5,9 mm           |
| Length                 | 147 mm        | (S)VOC tested        | No               |
|                        |               | Clamping range       | 6 x 3.2 - 6.5 mm |
|                        |               |                      | 6 x 5 - 10.2 mm  |
|                        |               |                      | 5 x 9 - 16.2 mm  |

KEL-DPZ 24|17 CR  
(S)VOC bk




|                        |               |                      |                  |
|------------------------|---------------|----------------------|------------------|
| Part No.               | 50705.600     | Width                | 58 mm            |
| EAN                    | 4251269327230 | Height               | 14 mm            |
| Package quantity       | 5             | Mounting height      | 14 mm            |
| For max. no. of cables | 17            | Cut-out size         | 112 × 36 mm      |
| Max. cable diameter    | 16,2 mm       | No. of screw holes   | 4                |
| Color                  | black         | Diam. of screw holes | 5,9 mm           |
| Length                 | 147 mm        | (S)VOC tested        | ja               |
|                        |               | Clamping range       | 6 x 3.2 - 6.5 mm |
|                        |               |                      | 6 x 5 - 10.2 mm  |
|                        |               |                      | 5 x 9 - 16.2 mm  |

KEL-DPZ 24|25 CR gy




|                        |                         |                      |                   |
|------------------------|-------------------------|----------------------|-------------------|
| Part No.               | 43710.601               | Width                | 58 mm             |
| EAN                    | 4251269327339           | Height               | 14 mm             |
| Package quantity       | 5                       | Mounting height      | 14 mm             |
| For max. no. of cables | 25                      | Cut-out size         | 112 × 36 mm       |
| Max. cable diameter    | 12 mm                   | No. of screw holes   | 4                 |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 5,9 mm            |
| Length                 | 147 mm                  | (S)VOC tested        | No                |
|                        |                         | Clamping range       | 12 x 3.2 - 6.5 mm |
|                        |                         |                      | 7 x 4.8 - 9.7 mm  |
|                        |                         |                      | 6 x 7.5 - 12 mm   |

KEL-DPZ 24|25 CR  
(S)VOC gy




|                        |                                |                      |                                                                               |
|------------------------|--------------------------------|----------------------|-------------------------------------------------------------------------------|
| Part No.               | <b>43710.600</b>               | Width                | <b>58 mm</b>                                                                  |
| EAN                    | <b>4251269327155</b>           | Height               | <b>14 mm</b>                                                                  |
| Package quantity       | <b>5</b>                       | Mounting height      | <b>14 mm</b>                                                                  |
| For max. no. of cables | <b>25</b>                      | Cut-out size         | <b>112 × 36 mm</b>                                                            |
| Max. cable diameter    | <b>12 mm</b>                   | No. of screw holes   | <b>4</b>                                                                      |
| Color                  | <b>gray (similar RAL 7035)</b> | Diam. of screw holes | <b>5,9 mm</b>                                                                 |
| Length                 | <b>147 mm</b>                  | (S)VOC tested        | <b>ja</b>                                                                     |
|                        |                                | Clamping range       | <b>12 x 3.2 - 6.5 mm</b><br><b>7 x 4.8 - 9.7 mm</b><br><b>6 x 7.5 - 12 mm</b> |

KEL-DPZ 24|25 CR  
(S)VOC bk




|                        |                      |                      |                                                                               |
|------------------------|----------------------|----------------------|-------------------------------------------------------------------------------|
| Part No.               | <b>50710.600</b>     | Width                | <b>58 mm</b>                                                                  |
| EAN                    | <b>4251269327247</b> | Height               | <b>14 mm</b>                                                                  |
| Package quantity       | <b>5</b>             | Mounting height      | <b>14 mm</b>                                                                  |
| For max. no. of cables | <b>25</b>            | Cut-out size         | <b>112 × 36 mm</b>                                                            |
| Max. cable diameter    | <b>12 mm</b>         | No. of screw holes   | <b>4</b>                                                                      |
| Color                  | <b>black</b>         | Diam. of screw holes | <b>5,9 mm</b>                                                                 |
| Length                 | <b>147 mm</b>        | (S)VOC tested        | <b>ja</b>                                                                     |
|                        |                      | Clamping range       | <b>12 x 3.2 - 6.5 mm</b><br><b>7 x 4.8 - 9.7 mm</b><br><b>6 x 7.5 - 12 mm</b> |

KEL-DPZ 24|25 CR bk




|                        |                      |                      |                                                                               |
|------------------------|----------------------|----------------------|-------------------------------------------------------------------------------|
| Part No.               | <b>50710.601</b>     | Width                | <b>58 mm</b>                                                                  |
| EAN                    | <b>4251269327421</b> | Height               | <b>14 mm</b>                                                                  |
| Package quantity       | <b>5</b>             | Mounting height      | <b>14 mm</b>                                                                  |
| For max. no. of cables | <b>25</b>            | Cut-out size         | <b>112 × 36 mm</b>                                                            |
| Max. cable diameter    | <b>12 mm</b>         | No. of screw holes   | <b>4</b>                                                                      |
| Color                  | <b>black</b>         | Diam. of screw holes | <b>5,9 mm</b>                                                                 |
| Length                 | <b>147 mm</b>        | (S)VOC tested        | <b>No</b>                                                                     |
|                        |                      | Clamping range       | <b>12 x 3.2 - 6.5 mm</b><br><b>7 x 4.8 - 9.7 mm</b><br><b>6 x 7.5 - 12 mm</b> |

KEL-DPZ 24|26 CR  
(S)VOC gy




|                        |                                |                      |                         |
|------------------------|--------------------------------|----------------------|-------------------------|
| Part No.               | <b>43711.600</b>               | Width                | <b>58 mm</b>            |
| EAN                    | <b>4251269327162</b>           | Height               | <b>14 mm</b>            |
| Package quantity       | <b>5</b>                       | Mounting height      | <b>14 mm</b>            |
| For max. no. of cables | <b>26</b>                      | Cut-out size         | <b>112 × 36 mm</b>      |
| Max. cable diameter    | <b>10,2 mm</b>                 | No. of screw holes   | <b>4</b>                |
| Color                  | <b>gray (similar RAL 7035)</b> | Diam. of screw holes | <b>5,9 mm</b>           |
| Length                 | <b>147 mm</b>                  | (S)VOC tested        | <b>ja</b>               |
|                        |                                | Clamping range       | <b>26 x 5 - 10.2 mm</b> |

KEL-DPZ 24|26 CR gy




|                        |                                |                      |                         |
|------------------------|--------------------------------|----------------------|-------------------------|
| Part No.               | <b>43711.601</b>               | Width                | <b>58 mm</b>            |
| EAN                    | <b>4251269327346</b>           | Height               | <b>14 mm</b>            |
| Package quantity       | <b>5</b>                       | Mounting height      | <b>14 mm</b>            |
| For max. no. of cables | <b>26</b>                      | Cut-out size         | <b>112 × 36 mm</b>      |
| Max. cable diameter    | <b>10,2 mm</b>                 | No. of screw holes   | <b>4</b>                |
| Color                  | <b>gray (similar RAL 7035)</b> | Diam. of screw holes | <b>5,9 mm</b>           |
| Length                 | <b>147 mm</b>                  | (S)VOC tested        | <b>No</b>               |
|                        |                                | Clamping range       | <b>26 x 5 - 10.2 mm</b> |

KEL-DPZ 24|26 CR bk



|                        |               |                      |                  |
|------------------------|---------------|----------------------|------------------|
| Part No.               | 50711.601     | Width                | 58 mm            |
| EAN                    | 4251269327438 | Height               | 14 mm            |
| Package quantity       | 5             | Mounting height      | 14 mm            |
| For max. no. of cables | 26            | Cut-out size         | 112 × 36 mm      |
| Max. cable diameter    | 10,2 mm       | No. of screw holes   | 4                |
| Color                  | black         | Diam. of screw holes | 5,9 mm           |
| Length                 | 147 mm        | (S)VOC tested        | No               |
|                        |               | Clamping range       | 26 x 5 - 10.2 mm |

KEL-DPZ 24|26 CR (S)VOC bk




|                        |               |                      |                  |
|------------------------|---------------|----------------------|------------------|
| Part No.               | 50711.600     | Width                | 58 mm            |
| EAN                    | 4251269327254 | Height               | 14 mm            |
| Package quantity       | 5             | Mounting height      | 14 mm            |
| For max. no. of cables | 26            | Cut-out size         | 112 × 36 mm      |
| Max. cable diameter    | 10,2 mm       | No. of screw holes   | 4                |
| Color                  | black         | Diam. of screw holes | 5,9 mm           |
| Length                 | 147 mm        | (S)VOC tested        | ja               |
|                        |               | Clamping range       | 26 x 5 - 10.2 mm |

KEL-DPZ 24|32 CR gy




|                        |                         |                      |                                                         |
|------------------------|-------------------------|----------------------|---------------------------------------------------------|
| Part No.               | 43730.601               | Width                | 58 mm                                                   |
| EAN                    | 4251269327384           | Height               | 14 mm                                                   |
| Package quantity       | 5                       | Mounting height      | 14 mm                                                   |
| For max. no. of cables | 32                      | Cut-out size         | 112 × 36 mm                                             |
| Max. cable diameter    | 12 mm                   | No. of screw holes   | 4                                                       |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 5,9 mm                                                  |
| Length                 | 147 mm                  | (S)VOC tested        | No                                                      |
|                        |                         | Clamping range       | 21 x 3.2 - 6.5 mm<br>8 x 5 - 10.2 mm<br>3 x 7.5 - 12 mm |

KEL-DPZ 24|32 CR (S)VOC gy




|                        |                         |                      |                                                         |
|------------------------|-------------------------|----------------------|---------------------------------------------------------|
| Part No.               | 43730.600               | Width                | 58 mm                                                   |
| EAN                    | 4251269327209           | Height               | 14 mm                                                   |
| Package quantity       | 5                       | Mounting height      | 14 mm                                                   |
| For max. no. of cables | 32                      | Cut-out size         | 112 × 36 mm                                             |
| Max. cable diameter    | 12 mm                   | No. of screw holes   | 4                                                       |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 5,9 mm                                                  |
| Length                 | 147 mm                  | (S)VOC tested        | ja                                                      |
|                        |                         | Clamping range       | 21 x 3.2 - 6.5 mm<br>8 x 5 - 10.2 mm<br>3 x 7.5 - 12 mm |

KEL-DPZ 24|32 CR bk




|                        |               |                      |                                                         |
|------------------------|---------------|----------------------|---------------------------------------------------------|
| Part No.               | 50730.601     | Width                | 58 mm                                                   |
| EAN                    | 4251269327476 | Height               | 14 mm                                                   |
| Package quantity       | 5             | Mounting height      | 14 mm                                                   |
| For max. no. of cables | 32            | Cut-out size         | 112 × 36 mm                                             |
| Max. cable diameter    | 12 mm         | No. of screw holes   | 4                                                       |
| Color                  | black         | Diam. of screw holes | 5,9 mm                                                  |
| Length                 | 147 mm        | (S)VOC tested        | No                                                      |
|                        |               | Clamping range       | 21 x 3.2 - 6.5 mm<br>8 x 5 - 10.2 mm<br>3 x 7.5 - 12 mm |

KEL-DPZ 24|32 CR  
(S)VOC bk



|                        |               |                      |                                                         |
|------------------------|---------------|----------------------|---------------------------------------------------------|
| Part No.               | 50730.600     | Width                | 58 mm                                                   |
| EAN                    | 4251269327292 | Height               | 14 mm                                                   |
| Package quantity       | 5             | Mounting height      | 14 mm                                                   |
| For max. no. of cables | 32            | Cut-out size         | 112 × 36 mm                                             |
| Max. cable diameter    | 12 mm         | No. of screw holes   | 4                                                       |
| Color                  | black         | Diam. of screw holes | 5,9 mm                                                  |
| Length                 | 147 mm        | (S)VOC tested        | ja                                                      |
|                        |               | Clamping range       | 21 x 3.2 - 6.5 mm<br>8 x 5 - 10.2 mm<br>3 x 7.5 - 12 mm |

KEL-DPZ 24|42 CR gy



|                        |                         |                      |                   |
|------------------------|-------------------------|----------------------|-------------------|
| Part No.               | 43715.601               | Width                | 58 mm             |
| EAN                    | 4251269327353           | Height               | 14 mm             |
| Package quantity       | 5                       | Mounting height      | 14 mm             |
| For max. no. of cables | 42                      | Cut-out size         | 112 × 36 mm       |
| Max. cable diameter    | 6,5 mm                  | No. of screw holes   | 4                 |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 5,9 mm            |
| Length                 | 147 mm                  | (S)VOC tested        | No                |
|                        |                         | Clamping range       | 42 x 3.2 - 6.5 mm |

KEL-DPZ 24|42 CR  
(S)VOC gy



|                        |                         |                      |                   |
|------------------------|-------------------------|----------------------|-------------------|
| Part No.               | 43715.600               | Width                | 58 mm             |
| EAN                    | 4251269327179           | Height               | 14 mm             |
| Package quantity       | 5                       | Mounting height      | 14 mm             |
| For max. no. of cables | 42                      | Cut-out size         | 112 × 36 mm       |
| Max. cable diameter    | 6,5 mm                  | No. of screw holes   | 4                 |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 5,9 mm            |
| Length                 | 147 mm                  | (S)VOC tested        | ja                |
|                        |                         | Clamping range       | 42 x 3.2 - 6.5 mm |

KEL-DPZ 24|42 CR bk




|                        |               |                      |                   |
|------------------------|---------------|----------------------|-------------------|
| Part No.               | 50715.601     | Width                | 58 mm             |
| EAN                    | 4251269327445 | Height               | 14 mm             |
| Package quantity       | 5             | Mounting height      | 14 mm             |
| For max. no. of cables | 42            | Cut-out size         | 112 × 36 mm       |
| Max. cable diameter    | 6,5 mm        | No. of screw holes   | 4                 |
| Color                  | black         | Diam. of screw holes | 5,9 mm            |
| Length                 | 147 mm        | (S)VOC tested        | No                |
|                        |               | Clamping range       | 42 x 3.2 - 6.5 mm |

KEL-DPZ 24|42 CR  
(S)VOC bk





|                        |               |                      |                   |
|------------------------|---------------|----------------------|-------------------|
| Part No.               | 50715.600     | Width                | 58 mm             |
| EAN                    | 4251269327261 | Height               | 14 mm             |
| Package quantity       | 5             | Mounting height      | 14 mm             |
| For max. no. of cables | 42            | Cut-out size         | 112 × 36 mm       |
| Max. cable diameter    | 6,5 mm        | No. of screw holes   | 4                 |
| Color                  | black         | Diam. of screw holes | 5,9 mm            |
| Length                 | 147 mm        | (S)VOC tested        | ja                |
|                        |               | Clamping range       | 42 x 3.2 - 6.5 mm |

KEL-DPZ 24|121 CR gy




|                        |                         |                      |                                      |
|------------------------|-------------------------|----------------------|--------------------------------------|
| Part No.               | 43735.601               | Width                | 58 mm                                |
| EAN                    | 4251269327391           | Height               | 14 mm                                |
| Package quantity       | 5                       | Mounting height      | 14 mm                                |
| For max. no. of cables | 121                     | Cut-out size         | 112 × 36 mm                          |
| Max. cable diameter    | 5 mm                    | No. of screw holes   | 4                                    |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 5,9 mm                               |
| Length                 | 147 mm                  | (S)VOC tested        | No                                   |
|                        |                         | Clamping range       | 119 x 1.5 - 2.6 mm<br>2 x 2.5 - 5 mm |


|                                                                                  |                        |                                |                      |                                                    |
|----------------------------------------------------------------------------------|------------------------|--------------------------------|----------------------|----------------------------------------------------|
| <b>KEL-DPZ 24 121 CR<br/>(S)VOC gy</b>                                           |                        |                                |                      |                                                    |
|  | Part No.               | <b>43735.600</b>               | Width                | <b>58 mm</b>                                       |
|                                                                                  | EAN                    | <b>4251269327216</b>           | Height               | <b>14 mm</b>                                       |
|                                                                                  | Package quantity       | <b>5</b>                       | Mounting height      | <b>14 mm</b>                                       |
|                                                                                  | For max. no. of cables | <b>121</b>                     | Cut-out size         | <b>112 × 36 mm</b>                                 |
|                                                                                  | Max. cable diameter    | <b>5 mm</b>                    | No. of screw holes   | <b>4</b>                                           |
|                                                                                  | Color                  | <b>gray (similar RAL 7035)</b> | Diam. of screw holes | <b>5,9 mm</b>                                      |
|                                                                                  | Length                 | <b>147 mm</b>                  | (S)VOC tested        | <b>ja</b>                                          |
|                                                                                  |                        |                                | Clamping range       | <b>119 x 1.5 - 2.6 mm</b><br><b>2 x 2.5 - 5 mm</b> |

|                                                                                  |                        |                      |                                                    |                    |
|----------------------------------------------------------------------------------|------------------------|----------------------|----------------------------------------------------|--------------------|
|  | Part No.               | <b>50735.601</b>     | Width                                              | <b>58 mm</b>       |
|                                                                                  | EAN                    | <b>4251269327483</b> | Height                                             | <b>14 mm</b>       |
|                                                                                  | Package quantity       | <b>5</b>             | Mounting height                                    | <b>14 mm</b>       |
|                                                                                  | For max. no. of cables | <b>121</b>           | Cut-out size                                       | <b>112 × 36 mm</b> |
|                                                                                  | Max. cable diameter    | <b>5 mm</b>          | No. of screw holes                                 | <b>4</b>           |
|                                                                                  | Color                  | <b>black</b>         | Diam. of screw holes                               | <b>5,9 mm</b>      |
|                                                                                  | Length                 | <b>147 mm</b>        | (S)VOC tested                                      | <b>No</b>          |
|                                                                                  |                        | Clamping range       | <b>119 x 1.5 - 2.6 mm</b><br><b>2 x 2.5 - 5 mm</b> |                    |

|                                                                                  |                        |                      |                      |                                                    |
|----------------------------------------------------------------------------------|------------------------|----------------------|----------------------|----------------------------------------------------|
|  | Part No.               | <b>50735.600</b>     | Width                | <b>58 mm</b>                                       |
|                                                                                  | EAN                    | <b>4251269327308</b> | Height               | <b>14 mm</b>                                       |
|                                                                                  | Package quantity       | <b>5</b>             | Mounting height      | <b>14 mm</b>                                       |
|                                                                                  | For max. no. of cables | <b>121</b>           | Cut-out size         | <b>112 × 36 mm</b>                                 |
|                                                                                  | Max. cable diameter    | <b>5 mm</b>          | No. of screw holes   | <b>4</b>                                           |
|                                                                                  | Color                  | <b>black</b>         | Diam. of screw holes | <b>5,9 mm</b>                                      |
|                                                                                  | Length                 | <b>147 mm</b>        | (S)VOC tested        | <b>ja</b>                                          |
|                                                                                  |                        |                      | Clamping range       | <b>119 x 1.5 - 2.6 mm</b><br><b>2 x 2.5 - 5 mm</b> |


|                                                                                    |                                                                                                         |                                                                                                                                      |                                                                                                                                        |
|------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| <b>KEL-DPZ 16 11 CR gy</b>                                                         |                                                                                                         |                                                                                                                                      |                                                                                                                                        |
|  | Part No.<br>EAN<br>Package quantity<br>For max. no. of cables<br>Max. cable diameter<br>Color<br>Length | <b>43815.601</b><br><b>4251269327643</b><br><b>5</b><br><b>11</b><br><b>12 mm</b><br><b>gray (similar RAL 7035)</b><br><b>120 mm</b> | Width<br>Height<br>Mounting height<br>Cut-out size<br>No. of screw holes<br>Diam. of screw holes<br>(S)VOC tested<br>Clamping range    |
|                                                                                    |                                                                                                         |                                                                                                                                      | <b>58 mm</b><br><b>14 mm</b><br><b>14 mm</b><br><b>86 x 36 mm</b><br><b>4</b><br><b>5,8 mm</b><br><b>No</b><br><b>11 x 7.5 - 12 mm</b> |

|                                                                                     |                        |                                |                      |                         |
|-------------------------------------------------------------------------------------|------------------------|--------------------------------|----------------------|-------------------------|
|  | Part No.               | <b>43815.600</b>               | Width                | <b>58 mm</b>            |
|                                                                                     | EAN                    | <b>4251269327544</b>           | Height               | <b>14 mm</b>            |
|                                                                                     | Package quantity       | <b>5</b>                       | Mounting height      | <b>14 mm</b>            |
|                                                                                     | For max. no. of cables | <b>11</b>                      | Cut-out size         | <b>86 × 36 mm</b>       |
|                                                                                     | Max. cable diameter    | <b>12 mm</b>                   | No. of screw holes   | <b>4</b>                |
|                                                                                     | Color                  | <b>gray (similar RAL 7035)</b> | Diam. of screw holes | <b>5,8 mm</b>           |
|                                                                                     | Length                 | <b>120 mm</b>                  | (S)VOC tested        | <b>ja</b>               |
|                                                                                     |                        |                                | Clamping range       | <b>11 x 7.5 - 12 mm</b> |




Part No. **43816.601**  
EAN **4251269327650**  
Package quantity **5**  
For max. no. of cables **14**  
Max. cable diameter **16,2 mm**  
Color **gray (similar RAL 7035)**  
Length **120 mm**

Width **58 mm**  
Height **14 mm**  
Mounting height **14 mm**  
Cut-out size **86 × 36 mm**  
No. of screw holes **4**  
Diam. of screw holes **5,8 mm**  
(S)VOC tested **No**  
Clamping range **5 x 3.2 - 6.5 mm**  
**5 x 5 - 10.2 mm**  
**4 x 9 - 16.2 mm**




Part No. **43816.600**  
EAN **4251269327551**  
Package quantity **5**  
For max. no. of cables **14**  
Max. cable diameter **16,2 mm**  
Color **gray (similar RAL 7035)**  
Length **120 mm**

Width **58 mm**  
Height **14 mm**  
Mounting height **14 mm**  
Cut-out size **86 × 36 mm**  
No. of screw holes **4**  
Diam. of screw holes **5,8 mm**  
(S)VOC tested **ja**  
Clamping range **5 x 3.2 - 6.5 mm**  
**5 x 5 - 10.2 mm**  
**4 x 9 - 16.2 mm**




Part No. **43817.601**  
EAN **4251269327667**  
Package quantity **5**  
For max. no. of cables **20**  
Max. cable diameter **12 mm**  
Color **gray (similar RAL 7035)**  
Length **120 mm**

Width **58 mm**  
Height **14 mm**  
Mounting height **14 mm**  
Cut-out size **86 × 36 mm**  
No. of screw holes **4**  
Diam. of screw holes **5,8 mm**  
(S)VOC tested **No**  
Clamping range **11 x 3.2 - 6.5 mm**  
**5 x 5 - 10.2 mm**  
**4 x 7.5 - 12 mm**



Part No. **43817.600**  
EAN **4251269327568**  
Package quantity **5**  
For max. no. of cables **20**  
Max. cable diameter **12 mm**  
Color **gray (similar RAL 7035)**  
Length **120 mm**


Width **58 mm**  
Height **14 mm**  
Mounting height **14 mm**  
Cut-out size **86 × 36 mm**  
No. of screw holes **4**  
Diam. of screw holes **5,8 mm**  
(S)VOC tested **ja**  
Clamping range **11 x 3.2 - 6.5 mm**  
**5 x 5 - 10.2 mm**  
**4 x 7.5 - 12 mm**



Part No. **43818.601**  
EAN **4251269327674**  
Package quantity **5**  
For max. no. of cables **25**  
Max. cable diameter **12 mm**  
Color **gray (similar RAL 7035)**  
Length **120 mm**


Width **58 mm**  
Height **14 mm**  
Mounting height **14 mm**  
Cut-out size **86 × 36 mm**  
No. of screw holes **4**  
Diam. of screw holes **5,8 mm**  
(S)VOC tested **No**  
Clamping range **16 x 3.2 - 6.5 mm**  
**6 x 5 - 10.2 mm**  
**3 x 7.5 - 12 mm**

KEL-DPZ 16|25 CR  
(S)VOC gy




|                        |                         |                      |                   |
|------------------------|-------------------------|----------------------|-------------------|
| Part No.               | 43818.600               | Width                | 58 mm             |
| EAN                    | 4251269327575           | Height               | 14 mm             |
| Package quantity       | 5                       | Mounting height      | 14 mm             |
| For max. no. of cables | 25                      | Cut-out size         | 86 × 36 mm        |
| Max. cable diameter    | 12 mm                   | No. of screw holes   | 4                 |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 5,8 mm            |
| Length                 | 120 mm                  | (S)VOC tested        | ja                |
|                        |                         | Clamping range       | 16 x 3.2 - 6.5 mm |
|                        |                         |                      | 6 x 5 - 10.2 mm   |
|                        |                         |                      | 3 x 7.5 - 12 mm   |

KEL-DPZ 16|34 CR gy




|                        |                         |                      |                   |
|------------------------|-------------------------|----------------------|-------------------|
| Part No.               | 43819.601               | Width                | 58 mm             |
| EAN                    | 4251269327681           | Height               | 14 mm             |
| Package quantity       | 5                       | Mounting height      | 14 mm             |
| For max. no. of cables | 34                      | Cut-out size         | 86 × 36 mm        |
| Max. cable diameter    | 6,5 mm                  | No. of screw holes   | 4                 |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 5,8 mm            |
| Length                 | 120 mm                  | (S)VOC tested        | No                |
|                        |                         | Clamping range       | 34 x 3.2 - 6.5 mm |

KEL-DPZ 16|34 CR  
(S)VOC gy




|                        |                         |                      |                   |
|------------------------|-------------------------|----------------------|-------------------|
| Part No.               | 43819.600               | Width                | 58 mm             |
| EAN                    | 4251269327582           | Height               | 14 mm             |
| Package quantity       | 5                       | Mounting height      | 14 mm             |
| For max. no. of cables | 34                      | Cut-out size         | 86 × 36 mm        |
| Max. cable diameter    | 6,5 mm                  | No. of screw holes   | 4                 |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 5,8 mm            |
| Length                 | 120 mm                  | (S)VOC tested        | ja                |
|                        |                         | Clamping range       | 34 x 3.2 - 6.5 mm |

KEL-DPZ 6|12 CR gy




|                        |                         |                      |                 |
|------------------------|-------------------------|----------------------|-----------------|
| Part No.               | 43809.601               | Width                | 54 mm           |
| EAN                    | 4251269327599           | Height               | 7,5 mm          |
| Package quantity       | 5                       | Mounting height      | 7,5 mm          |
| For max. no. of cables | 12                      | Cut-out size         | 52 × 36 mm      |
| Max. cable diameter    | 8 mm                    | No. of screw holes   | 4               |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 4,5             |
| Length                 | 85,5 mm                 | (S)VOC tested        | No              |
|                        |                         | Clamping range       | 12 x 4.5 - 8 mm |

KEL-DPZ 6|12 CR  
(S)VOC gy




|                        |                         |                      |                 |
|------------------------|-------------------------|----------------------|-----------------|
| Part No.               | 43809.600               | Width                | 54 mm           |
| EAN                    | 4251269327490           | Height               | 7,5 mm          |
| Package quantity       | 5                       | Mounting height      | 7,5 mm          |
| For max. no. of cables | 12                      | Cut-out size         | 52 × 36 mm      |
| Max. cable diameter    | 8 mm                    | No. of screw holes   | 4               |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 4,5             |
| Length                 | 85,5 mm                 | (S)VOC tested        | ja              |
|                        |                         | Clamping range       | 12 x 4.5 - 8 mm |

KEL-DPZ 6|18 CR gy




|                        |                         |                      |                   |
|------------------------|-------------------------|----------------------|-------------------|
| Part No.               | 43812.601               | Width                | 54 mm             |
| EAN                    | 4251269327612           | Height               | 7,5 mm            |
| Package quantity       | 5                       | Mounting height      | 7,5 mm            |
| For max. no. of cables | 18                      | Cut-out size         | 52 × 36 mm        |
| Max. cable diameter    | 6,5 mm                  | No. of screw holes   | 4                 |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 4,5               |
| Length                 | 85,5 mm                 | (S)VOC tested        | No                |
|                        |                         | Clamping range       | 18 x 3.2 - 6.5 mm |

KEL-DPZ 6|18 CR  
(S)VOC gy




|                        |                         |                      |                   |
|------------------------|-------------------------|----------------------|-------------------|
| Part No.               | 43812.600               | Width                | 54 mm             |
| EAN                    | 4251269327513           | Height               | 7,5 mm            |
| Package quantity       | 5                       | Mounting height      | 7,5 mm            |
| For max. no. of cables | 18                      | Cut-out size         | 52 × 36 mm        |
| Max. cable diameter    | 6,5 mm                  | No. of screw holes   | 4                 |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 4,5               |
| Length                 | 85,5 mm                 | (S)VOC tested        | ja                |
|                        |                         | Clamping range       | 18 x 3.2 - 6.5 mm |

KEL-DPZ 6|18-1 CR gy




|                        |                         |                      |                                                      |
|------------------------|-------------------------|----------------------|------------------------------------------------------|
| Part No.               | 43811.601               | Width                | 54 mm                                                |
| EAN                    | 4251269327605           | Height               | 7,5 mm                                               |
| Package quantity       | 5                       | Mounting height      | 7,5 mm                                               |
| For max. no. of cables | 18                      | Cut-out size         | 52 × 36 mm                                           |
| Max. cable diameter    | 8 mm                    | No. of screw holes   | 4                                                    |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 4,5                                                  |
| Length                 | 85,5 mm                 | (S)VOC tested        | No                                                   |
|                        |                         | Clamping range       | 7 x 4.5 - 8 mm<br>5 x 3.2 - 6.5 mm<br>6 x 2.5 - 5 mm |

KEL-DPZ 6|18-1 CR  
(S)VOC gy




|                        |                         |                      |                                                      |
|------------------------|-------------------------|----------------------|------------------------------------------------------|
| Part No.               | 43811.600               | Width                | 54 mm                                                |
| EAN                    | 4251269327506           | Height               | 7,5 mm                                               |
| Package quantity       | 5                       | Mounting height      | 7,5 mm                                               |
| For max. no. of cables | 18                      | Cut-out size         | 52 × 36 mm                                           |
| Max. cable diameter    | 8 mm                    | No. of screw holes   | 4                                                    |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 4,5                                                  |
| Length                 | 85,5 mm                 | (S)VOC tested        | ja                                                   |
|                        |                         | Clamping range       | 7 x 4.5 - 8 mm<br>5 x 3.2 - 6.5 mm<br>6 x 2.5 - 5 mm |

KEL-DPZ 6|23 CR gy




|                        |                         |                      |                                      |
|------------------------|-------------------------|----------------------|--------------------------------------|
| Part No.               | 43813.601               | Width                | 54 mm                                |
| EAN                    | 4251269327629           | Height               | 7,5 mm                               |
| Package quantity       | 5                       | Mounting height      | 7,5 mm                               |
| For max. no. of cables | 23                      | Cut-out size         | 52 × 36 mm                           |
| Max. cable diameter    | 6,5 mm                  | No. of screw holes   | 4                                    |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 4,5                                  |
| Length                 | 85,5 mm                 | (S)VOC tested        | No                                   |
|                        |                         | Clamping range       | 10 x 3.2 - 6.5 mm<br>13 x 2.5 - 5 mm |

KEL-DPZ 6|23 CR  
(S)VOC gy




|                        |                         |                      |                                      |
|------------------------|-------------------------|----------------------|--------------------------------------|
| Part No.               | 43813.600               | Width                | 54 mm                                |
| EAN                    | 4251269327520           | Height               | 7,5 mm                               |
| Package quantity       | 5                       | Mounting height      | 7,5 mm                               |
| For max. no. of cables | 23                      | Cut-out size         | 52 × 36 mm                           |
| Max. cable diameter    | 6,5 mm                  | No. of screw holes   | 4                                    |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 4,5                                  |
| Length                 | 85,5 mm                 | (S)VOC tested        | ja                                   |
|                        |                         | Clamping range       | 10 x 3.2 - 6.5 mm<br>13 x 2.5 - 5 mm |

KEL-DPZ 6|27 CR gy




|                        |                         |                      |                 |
|------------------------|-------------------------|----------------------|-----------------|
| Part No.               | 43814.601               | Width                | 54 mm           |
| EAN                    | 4251269327636           | Height               | 7,5 mm          |
| Package quantity       | 5                       | Mounting height      | 7,5 mm          |
| For max. no. of cables | 27                      | Cut-out size         | 52 × 36 mm      |
| Max. cable diameter    | 5 mm                    | No. of screw holes   | 4               |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 4,5             |
| Length                 | 85,5 mm                 | (S)VOC tested        | No              |
|                        |                         | Clamping range       | 27 x 2.5 - 5 mm |

KEL-DPZ 6|27 CR  
(S)VOC gy




|                        |                         |                      |                 |
|------------------------|-------------------------|----------------------|-----------------|
| Part No.               | 43814.600               | Width                | 54 mm           |
| EAN                    | 4251269327537           | Height               | 7,5 mm          |
| Package quantity       | 5                       | Mounting height      | 7,5 mm          |
| For max. no. of cables | 27                      | Cut-out size         | 52 × 36 mm      |
| Max. cable diameter    | 5 mm                    | No. of screw holes   | 4               |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 4,5             |
| Length                 | 85,5 mm                 | (S)VOC tested        | ja              |
|                        |                         | Clamping range       | 27 x 2.5 - 5 mm |

KEL-DPZ-B 13 CR gy




|                        |                         |                      |                                                       |
|------------------------|-------------------------|----------------------|-------------------------------------------------------|
| Part No.               | 43794.601               | Width                | 58 mm                                                 |
| EAN                    | 4251269327834           | Height               | 10 mm                                                 |
| Package quantity       | 5                       | Mounting height      | 10 mm                                                 |
| For max. no. of cables | 13                      | Cut-out size         | 46 × 46 mm                                            |
| Max. cable diameter    | 22 mm                   | No. of screw holes   | 4                                                     |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 5,7 mm                                                |
| Length                 | 72,8 mm                 | (S)VOC tested        | No                                                    |
|                        |                         | Clamping range       | 8 x 3.2 - 6.5 mm<br>4 x 5 - 10.2 mm<br>1 x 16 - 22 mm |

KEL-DPZ-B 13 CR  
(S)VOC gy




|                        |                         |                      |                                                       |
|------------------------|-------------------------|----------------------|-------------------------------------------------------|
| Part No.               | 43794.600               | Width                | 58 mm                                                 |
| EAN                    | 4251269327711           | Height               | 10 mm                                                 |
| Package quantity       | 5                       | Mounting height      | 10 mm                                                 |
| For max. no. of cables | 13                      | Cut-out size         | 46 × 46 mm                                            |
| Max. cable diameter    | 22 mm                   | No. of screw holes   | 4                                                     |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 5,7 mm                                                |
| Length                 | 72,8 mm                 | (S)VOC tested        | ja                                                    |
|                        |                         | Clamping range       | 8 x 3.2 - 6.5 mm<br>4 x 5 - 10.2 mm<br>1 x 16 - 22 mm |

KEL-DPZ-B 13 CR bk




|                        |               |                      |                                                       |
|------------------------|---------------|----------------------|-------------------------------------------------------|
| Part No.               | 50794.601     | Width                | 58 mm                                                 |
| EAN                    | 4251269327889 | Height               | 10 mm                                                 |
| Package quantity       | 5             | Mounting height      | 10 mm                                                 |
| For max. no. of cables | 13            | Cut-out size         | 46 × 46 mm                                            |
| Max. cable diameter    | 22 mm         | No. of screw holes   | 4                                                     |
| Color                  | black         | Diam. of screw holes | 5,7 mm                                                |
| Length                 | 72,8 mm       | (S)VOC tested        | No                                                    |
|                        |               | Clamping range       | 8 x 3.2 - 6.5 mm<br>4 x 5 - 10.2 mm<br>1 x 16 - 22 mm |

KEL-DPZ-B 13 CR  
(S)VOC bk




|                        |               |                      |                                                       |
|------------------------|---------------|----------------------|-------------------------------------------------------|
| Part No.               | 50794.600     | Width                | 58 mm                                                 |
| EAN                    | 4251269327766 | Height               | 10 mm                                                 |
| Package quantity       | 5             | Mounting height      | 10 mm                                                 |
| For max. no. of cables | 13            | Cut-out size         | 46 × 46 mm                                            |
| Max. cable diameter    | 22 mm         | No. of screw holes   | 4                                                     |
| Color                  | black         | Diam. of screw holes | 5,7 mm                                                |
| Length                 | 72,8 mm       | (S)VOC tested        | ja                                                    |
|                        |               | Clamping range       | 8 x 3.2 - 6.5 mm<br>4 x 5 - 10.2 mm<br>1 x 16 - 22 mm |

KEL-DPZ-B 17 CR gy




|                        |                         |                      |                                                                            |
|------------------------|-------------------------|----------------------|----------------------------------------------------------------------------|
| Part No.               | 43796.601               | Width                | 58 mm                                                                      |
| EAN                    | 4251269327841           | Height               | 10 mm                                                                      |
| Package quantity       | 5                       | Mounting height      | 10 mm                                                                      |
| For max. no. of cables | 17                      | Cut-out size         | 46 × 46 mm                                                                 |
| Max. cable diameter    | 16,2 mm                 | No. of screw holes   | 4                                                                          |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 5,7 mm                                                                     |
| Length                 | 72,8 mm                 | (S)VOC tested        | No                                                                         |
|                        |                         | Clamping range       | 10 x 3.2 - 6.5 mm<br>4 x 5 - 10.2 mm<br>2 x 7.5 - 12 mm<br>1 x 9 - 16.2 mm |

KEL-DPZ-B 17 CR  
(S)VOC gy




|                        |                         |                      |                                                                            |
|------------------------|-------------------------|----------------------|----------------------------------------------------------------------------|
| Part No.               | 43796.600               | Width                | 58 mm                                                                      |
| EAN                    | 4251269327728           | Height               | 10 mm                                                                      |
| Package quantity       | 5                       | Mounting height      | 10 mm                                                                      |
| For max. no. of cables | 17                      | Cut-out size         | 46 × 46 mm                                                                 |
| Max. cable diameter    | 16,2 mm                 | No. of screw holes   | 4                                                                          |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 5,7 mm                                                                     |
| Length                 | 72,8 mm                 | (S)VOC tested        | ja                                                                         |
|                        |                         | Clamping range       | 10 x 3.2 - 6.5 mm<br>4 x 5 - 10.2 mm<br>2 x 7.5 - 12 mm<br>1 x 9 - 16.2 mm |

KEL-DPZ-B 17 CR bk




|                        |               |                      |                                                                            |
|------------------------|---------------|----------------------|----------------------------------------------------------------------------|
| Part No.               | 50796.601     | Width                | 58 mm                                                                      |
| EAN                    | 4251269327896 | Height               | 10 mm                                                                      |
| Package quantity       | 5             | Mounting height      | 10 mm                                                                      |
| For max. no. of cables | 17            | Cut-out size         | 46 × 46 mm                                                                 |
| Max. cable diameter    | 16,2 mm       | No. of screw holes   | 4                                                                          |
| Color                  | black         | Diam. of screw holes | 5,7 mm                                                                     |
| Length                 | 72,8 mm       | (S)VOC tested        | No                                                                         |
|                        |               | Clamping range       | 10 x 3.2 - 6.5 mm<br>4 x 5 - 10.2 mm<br>2 x 7.5 - 12 mm<br>1 x 9 - 16.2 mm |

KEL-DPZ-B 17 CR  
(S)VOC bk




|                        |               |                      |                                                                            |
|------------------------|---------------|----------------------|----------------------------------------------------------------------------|
| Part No.               | 50796.600     | Width                | 58 mm                                                                      |
| EAN                    | 4251269327773 | Height               | 10 mm                                                                      |
| Package quantity       | 5             | Mounting height      | 10 mm                                                                      |
| For max. no. of cables | 17            | Cut-out size         | 46 × 46 mm                                                                 |
| Max. cable diameter    | 16,2 mm       | No. of screw holes   | 4                                                                          |
| Color                  | black         | Diam. of screw holes | 5,7 mm                                                                     |
| Length                 | 72,8 mm       | (S)VOC tested        | ja                                                                         |
|                        |               | Clamping range       | 10 x 3.2 - 6.5 mm<br>4 x 5 - 10.2 mm<br>2 x 7.5 - 12 mm<br>1 x 9 - 16.2 mm |

KEL-DPZ-B 25 CR gy




|                        |                         |                      |                   |
|------------------------|-------------------------|----------------------|-------------------|
| Part No.               | 43798.601               | Width                | 58 mm             |
| EAN                    | 4251269327858           | Height               | 10 mm             |
| Package quantity       | 5                       | Mounting height      | 10 mm             |
| For max. no. of cables | 25                      | Cut-out size         | 46 × 46 mm        |
| Max. cable diameter    | 6,5 mm                  | No. of screw holes   | 4                 |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 5,7 mm            |
| Length                 | 72,8 mm                 | (S)VOC tested        | No                |
|                        |                         | Clamping range       | 25 x 3.2 - 6.5 mm |

KEL-DPZ-B 25 CR  
(S)VOC gy




|                        |                         |                      |                   |
|------------------------|-------------------------|----------------------|-------------------|
| Part No.               | 43798.600               | Width                | 58 mm             |
| EAN                    | 4251269327735           | Height               | 10 mm             |
| Package quantity       | 5                       | Mounting height      | 10 mm             |
| For max. no. of cables | 25                      | Cut-out size         | 46 × 46 mm        |
| Max. cable diameter    | 6,5 mm                  | No. of screw holes   | 4                 |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 5,7 mm            |
| Length                 | 72,8 mm                 | (S)VOC tested        | ja                |
|                        |                         | Clamping range       | 25 x 3.2 - 6.5 mm |


KEL-DPZ-B 25 CR bk




|                        |               |                      |                   |
|------------------------|---------------|----------------------|-------------------|
| Part No.               | 50798.601     | Width                | 58 mm             |
| EAN                    | 4251269327902 | Height               | 10 mm             |
| Package quantity       | 5             | Mounting height      | 10 mm             |
| For max. no. of cables | 25            | Cut-out size         | 46 × 46 mm        |
| Max. cable diameter    | 6,5 mm        | No. of screw holes   | 4                 |
| Color                  | black         | Diam. of screw holes | 5,7 mm            |
| Length                 | 72,8 mm       | (S)VOC tested        | No                |
|                        |               | Clamping range       | 25 x 3.2 - 6.5 mm |




|                        |                      |                      |                          |
|------------------------|----------------------|----------------------|--------------------------|
| Part No.               | <b>50798.600</b>     | Width                | <b>58 mm</b>             |
| EAN                    | <b>4251269327780</b> | Height               | <b>10 mm</b>             |
| Package quantity       | <b>5</b>             | Mounting height      | <b>10 mm</b>             |
| For max. no. of cables | <b>25</b>            | Cut-out size         | <b>46 × 46 mm</b>        |
| Max. cable diameter    | <b>6,5 mm</b>        | No. of screw holes   | <b>4</b>                 |
| Color                  | <b>black</b>         | Diam. of screw holes | <b>5,7 mm</b>            |
| Length                 | <b>72,8 mm</b>       | (S)VOC tested        | <b>ja</b>                |
|                        |                      | Clamping range       | <b>25 x 3.2 - 6.5 mm</b> |



|                        |                                |                      |                        |
|------------------------|--------------------------------|----------------------|------------------------|
| Part No.               | <b>43780.601</b>               | Width                | <b>29 mm</b>           |
| EAN                    | <b>4251269327810</b>           | Height               | <b>14 mm</b>           |
| Package quantity       | <b>5</b>                       | Mounting height      | <b>14 mm</b>           |
| For max. no. of cables | <b>7</b>                       | No. of screw holes   | <b>2</b>               |
| Max. cable diameter    | <b>12 mm</b>                   | Diam. of screw holes | <b>5,7 mm</b>          |
| Color                  | <b>gray (similar RAL 7035)</b> | (S)VOC tested        | <b>No</b>              |
| Length                 | <b>147 mm</b>                  | Clamping range       | <b>7 x 7.5 - 12 mm</b> |




|                        |                                |                      |                        |
|------------------------|--------------------------------|----------------------|------------------------|
| Part No.               | <b>43780.600</b>               | Width                | <b>29 mm</b>           |
| EAN                    | <b>4251269327698</b>           | Height               | <b>14 mm</b>           |
| Package quantity       | <b>5</b>                       | Mounting height      | <b>14 mm</b>           |
| For max. no. of cables | <b>7</b>                       | No. of screw holes   | <b>2</b>               |
| Max. cable diameter    | <b>12 mm</b>                   | Diam. of screw holes | <b>5,7 mm</b>          |
| Color                  | <b>gray (similar RAL 7035)</b> | (S)VOC tested        | <b>ja</b>              |
| Length                 | <b>147 mm</b>                  | Clamping range       | <b>7 x 7.5 - 12 mm</b> |




|                        |                      |                      |                        |
|------------------------|----------------------|----------------------|------------------------|
| Part No.               | <b>50780.601</b>     | Width                | <b>29 mm</b>           |
| EAN                    | <b>4251269327865</b> | Height               | <b>14 mm</b>           |
| Package quantity       | <b>5</b>             | Mounting height      | <b>14 mm</b>           |
| For max. no. of cables | <b>7</b>             | No. of screw holes   | <b>2</b>               |
| Max. cable diameter    | <b>12 mm</b>         | Diam. of screw holes | <b>5,7 mm</b>          |
| Color                  | <b>black</b>         | (S)VOC tested        | <b>No</b>              |
| Length                 | <b>147 mm</b>        | Clamping range       | <b>7 x 7.5 - 12 mm</b> |



|                        |                      |                      |                        |
|------------------------|----------------------|----------------------|------------------------|
| Part No.               | <b>50780.600</b>     | Width                | <b>29 mm</b>           |
| EAN                    | <b>4251269327742</b> | Height               | <b>14 mm</b>           |
| Package quantity       | <b>5</b>             | Mounting height      | <b>14 mm</b>           |
| For max. no. of cables | <b>7</b>             | No. of screw holes   | <b>2</b>               |
| Max. cable diameter    | <b>12 mm</b>         | Diam. of screw holes | <b>5,7 mm</b>          |
| Color                  | <b>black</b>         | (S)VOC tested        | <b>ja</b>              |
| Length                 | <b>147 mm</b>        | Clamping range       | <b>7 x 7.5 - 12 mm</b> |



|                        |                                |                      |                          |
|------------------------|--------------------------------|----------------------|--------------------------|
| Part No.               | <b>43790.601</b>               | Width                | <b>29 mm</b>             |
| EAN                    | <b>4251269327827</b>           | Height               | <b>14 mm</b>             |
| Package quantity       | <b>5</b>                       | Mounting height      | <b>14 mm</b>             |
| For max. no. of cables | <b>21</b>                      | No. of screw holes   | <b>2</b>                 |
| Max. cable diameter    | <b>6,5 mm</b>                  | Diam. of screw holes | <b>5,7 mm</b>            |
| Color                  | <b>gray (similar RAL 7035)</b> | (S)VOC tested        | <b>No</b>                |
| Length                 | <b>147 mm</b>                  | Clamping range       | <b>21 x 3.2 - 6.5 mm</b> |



|                        |                                |                      |                          |
|------------------------|--------------------------------|----------------------|--------------------------|
| Part No.               | <b>43790.600</b>               | Width                | <b>29 mm</b>             |
| EAN                    | <b>4251269327704</b>           | Height               | <b>14 mm</b>             |
| Package quantity       | <b>5</b>                       | Mounting height      | <b>14 mm</b>             |
| For max. no. of cables | <b>21</b>                      | No. of screw holes   | <b>2</b>                 |
| Max. cable diameter    | <b>6,5 mm</b>                  | Diam. of screw holes | <b>5,7 mm</b>            |
| Color                  | <b>gray (similar RAL 7035)</b> | (S)VOC tested        | <b>ja</b>                |
| Length                 | <b>147 mm</b>                  | Clamping range       | <b>21 x 3.2 - 6.5 mm</b> |

KEL-DPZ-E 112|21 CR  
bk




|                        |               |                      |                   |
|------------------------|---------------|----------------------|-------------------|
| Part No.               | 50790.601     | Width                | 29 mm             |
| EAN                    | 4251269327872 | Height               | 14 mm             |
| Package quantity       | 5             | Mounting height      | 14 mm             |
| For max. no. of cables | 21            | No. of screw holes   | 2                 |
| Max. cable diameter    | 6,5 mm        | Diam. of screw holes | 5,7 mm            |
| Color                  | black         | (S)VOC tested        | No                |
| Length                 | 147 mm        | Clamping range       | 21 x 3.2 - 6.5 mm |

KEL-DPZ-E 112|21 CR  
(S)VOC bk




|                        |               |                      |                   |
|------------------------|---------------|----------------------|-------------------|
| Part No.               | 50790.600     | Width                | 29 mm             |
| EAN                    | 4251269327759 | Height               | 14 mm             |
| Package quantity       | 5             | Mounting height      | 14 mm             |
| For max. no. of cables | 21            | No. of screw holes   | 2                 |
| Max. cable diameter    | 6,5 mm        | Diam. of screw holes | 5,7 mm            |
| Color                  | black         | (S)VOC tested        | ja                |
| Length                 | 147 mm        | Clamping range       | 21 x 3.2 - 6.5 mm |

KEL-DPZ-KX/KL 72 CR  
gy




|                        |                         |                      |                                                                            |
|------------------------|-------------------------|----------------------|----------------------------------------------------------------------------|
| Part No.               | 43675.001.601           | Width                | 90 mm                                                                      |
| EAN                    | 4251269327919           | Height               | 4 mm                                                                       |
| Package quantity       | 1                       | Mounting height      | 4 mm                                                                       |
| For max. no. of cables | 72                      | Cut-out size         | 192 x 62 mm                                                                |
| Max. cable diameter    | 22 mm                   | No. of screw holes   | 6                                                                          |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 5,1 mm                                                                     |
| Length                 | 221 mm                  | (S)VOC tested        | No                                                                         |
|                        |                         | Clamping range       | 42 x 3.2 - 6.5 mm<br>21 x 5 - 10.2 mm<br>6 x 9 - 16.2 mm<br>3 x 16 - 22 mm |

KEL-DPZ-KX/KL 72 CR  
(S)VOC gy




|                        |                         |                      |                                                                            |
|------------------------|-------------------------|----------------------|----------------------------------------------------------------------------|
| Part No.               | 43675.001.600           | Width                | 90 mm                                                                      |
| EAN                    | 4251269327797           | Height               | 4 mm                                                                       |
| Package quantity       | 1                       | Mounting height      | 4 mm                                                                       |
| For max. no. of cables | 72                      | Cut-out size         | 192 x 62 mm                                                                |
| Max. cable diameter    | 22 mm                   | No. of screw holes   | 6                                                                          |
| Color                  | gray (similar RAL 7035) | Diam. of screw holes | 5,1 mm                                                                     |
| Length                 | 221 mm                  | (S)VOC tested        | ja                                                                         |
|                        |                         | Clamping range       | 42 x 3.2 - 6.5 mm<br>21 x 5 - 10.2 mm<br>6 x 9 - 16.2 mm<br>3 x 16 - 22 mm |

KEL-DPZ-KX/KL 72 CR  
bk



|                        |               |                      |                                                                            |
|------------------------|---------------|----------------------|----------------------------------------------------------------------------|
| Part No.               | 43675.101.601 | Width                | 90 mm                                                                      |
| EAN                    | 4251269327926 | Height               | 4 mm                                                                       |
| Package quantity       | 1             | Mounting height      | 4 mm                                                                       |
| For max. no. of cables | 72            | Cut-out size         | 192 x 62 mm                                                                |
| Max. cable diameter    | 22 mm         | No. of screw holes   | 6                                                                          |
| Color                  | black         | Diam. of screw holes | 5,1 mm                                                                     |
| Length                 | 221 mm        | (S)VOC tested        | No                                                                         |
|                        |               | Clamping range       | 42 x 3.2 - 6.5 mm<br>21 x 5 - 10.2 mm<br>6 x 9 - 16.2 mm<br>3 x 16 - 22 mm |

KEL-DPZ-KX/KL 72 CR  
(S)VOC bk



|                        |               |                      |                   |
|------------------------|---------------|----------------------|-------------------|
| Part No.               | 43675.101.600 | Width                | 90 mm             |
| EAN                    | 4251269327803 | Height               | 4 mm              |
| Package quantity       | 1             | Mounting height      | 4 mm              |
| For max. no. of cables | 72            | Cut-out size         | 192 × 62 mm       |
| Max. cable diameter    | 22 mm         | No. of screw holes   | 6                 |
| Color                  | black         | Diam. of screw holes | 5,1 mm            |
| Length                 | 221 mm        | (S)VOC tested        | ja                |
|                        |               | Clamping range       | 42 x 3.2 - 6.5 mm |
|                        |               |                      | 21 x 5 - 10.2 mm  |
|                        |               |                      | 6 x 9 - 16.2 mm   |
|                        |               |                      | 3 x 16 - 22 mm    |

