

KEL-DPF | Pyramid cable entry grommets

for single cables with diameters up to 70 mm, M25 - M85 / IP66 / IP68 / UL Type 12/4X*



The KEL-DPF was developed particularly for routing large or unknown sizes of unterminated cables into a switch cabinet or machine (max. cable diameter 70 mm). Due to the flexibility and unique pyramid shape, cable entry and flexible positioning is much easier compared to using conventional cable glands. Also perfect for bundling or restraining large cables.

It is recommended that additional strain relief be provided for cables using cable ties.

Cutting of DPF grommets: Cable diameter less 20%. The corresponding diameters are marked on the grommet.

*4X for indoor use only

IP54	IP55	IP64	IP65	IP66	IP67
IP68	UL TYPE 12	UL TYPE 4X*	CULUS	RIIR	HL3 EN 45545-2
EN 61373	ECOLAB certified	ISO 4892-2A	Made in Germany	RoHS compliant	REACH COMPLIANCE

Specifications


IP rating (EN 60529)	IP54, IP55, IP64, IP65, IP66, IP67, IP68
UL Type (UL 50E)	UL Type 12, UL Type 4X*
Material	Elastomer Base frame: Polyamide
Flame class	UL94-V0, self-extinguishing
Operating temperature	-40 C° to 100 C°
Properties	silicone free, halogen free
Mounting options	Fasten with locknut

Advantages & benefits

- Quick assembly without tools
- It is possible to install rigid cables at angles
- Suitable for metric cut-outs
- Certified protection IP66/IP68 (acc. to EN 60529)
- Hexagonal locknut included in the delivery

Product types & sizes

KEL-DPF 25|3-12 gy



Part No.	42652
EAN	4251269309083
Package quantity	5
For max. no. of cables	1
Max. cable diameter	12 mm
Colour	grey (similar RAL 7035)
Height	54,9 mm


Mounting height	43,9 mm
External diameter	39 mm
Cut-out size, round	25,3 mm
Cut-out size, metric	M25
Thread	M25 x 1,5
Thread length	11 mm
Clamping range	3 - 12 mm
Clamping range	1 x 3 - 12 mm

KEL-DPF 25|3-12 bk




Part No.	50652	Mounting height	43,9 mm
EAN	4251269315039	External diameter	39 mm
Package quantity	5	Cut-out size, round	25,3 mm
For max. no. of cables	1	Cut-out size, metric	M25
Max. cable diameter	12 mm	Thread	M25 × 1,5
Colour	black	Thread length	11 mm
Height	54,9 mm	Clamping range	3 - 12 mm
		Clamping range	1 x 3 - 12 mm

KEL-DPF 32|6-18 gy




Part No.	42653	Mounting height	49,4 mm
EAN	4251269309090	External diameter	46 mm
Package quantity	5	Cut-out size, round	32,3 mm
For max. no. of cables	1	Cut-out size, metric	M32
Max. cable diameter	18 mm	Thread	M32 × 1,5
Colour	grey (similar RAL 7035)	Thread length	11 mm
Height	60,4 mm	Clamping range	6 - 18 mm
		Clamping range	1 x 6 - 18 mm

KEL-DPF 32|6-18 bk




Part No.	50653	Mounting height	49,4 mm
EAN	4251269315046	External diameter	46 mm
Package quantity	5	Cut-out size, round	32,3 mm
For max. no. of cables	1	Cut-out size, metric	M32
Max. cable diameter	18 mm	Thread	M32 × 1,5
Colour	black	Thread length	11 mm
Height	60,4 mm	Clamping range	6 - 18 mm
		Clamping range	1 x 6 - 18 mm

KEL-DPF 40|12-27 gy




Part No.	42654	Mounting height	54,9 mm
EAN	4251269309106	External diameter	54 mm
Package quantity	5	Cut-out size, round	40,4 mm
For max. no. of cables	1	Cut-out size, metric	M40
Max. cable diameter	27 mm	Thread	M40 × 1,5
Colour	grey (similar RAL 7035)	Thread length	11 mm
Height	65,9 mm	Clamping range	12 - 27 mm
		Clamping range	1 x 12 - 27 mm

KEL-DPF 40|12-27 bk



Part No.	50654	Mounting height	54,9 mm
EAN	4251269315053	External diameter	54 mm
Package quantity	5	Cut-out size, round	40,4 mm
For max. no. of cables	1	Cut-out size, metric	M40
Max. cable diameter	27 mm	Thread	M40 × 1,5
Colour	black	Thread length	11 mm
Height	65,9 mm	Clamping range	12 - 27 mm
		Clamping range	1 x 12 - 27 mm


KEL-DPF 50|22-36 gy



Part No.	42655
EAN	4251269309113
Package quantity	5
For max. no. of cables	1
Max. cable diameter	36 mm
Colour	grey (similar RAL 7035)
Height	65,9 mm


Mounting height	54,9 mm
External diameter	64 mm
Cut-out size, round	50,4 mm
Cut-out size, metric	M50
Thread	M50 × 1,5
Thread length	11 mm
Clamping range	22 - 36 mm
Clamping range	1 x 22 - 36 mm

KEL-DPF 50|22-36 bk

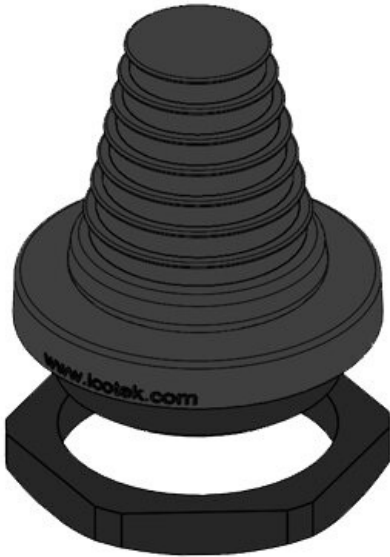

Part No.	50655	Mounting height	54,9 mm
EAN	4251269315060	External diameter	64 mm
Package quantity	5	Cut-out size, round	50,4 mm
For max. no. of cables	1	Cut-out size, metric	M50
Max. cable diameter	36 mm	Thread	M50 × 1,5
Colour	black	Thread length	11 mm
Height	65,9 mm	Clamping range	22 - 36 mm
		Clamping range	1 x 22 - 36 mm


KEL-DPF 63|27-50 gy



Part No.	42656
EAN	4251269309120
Package quantity	5
For max. no. of cables	1
Max. cable diameter	50 mm
Colour	grey (similar RAL 7035)
Height	82,4 mm

Mounting height	71,4 mm
External diameter	77 mm
Cut-out size, round	63,4 mm
Cut-out size, metric	M63
Thread	M63 × 1,5
Thread length	11 mm
Clamping range	27 - 50 mm
Clamping range	1 x 27 - 50 mm


KEL-DPF 63|27-50 bk



Part No.	50656
EAN	4251269315077
Package quantity	5
For max. no. of cables	1
Max. cable diameter	50 mm
Colour	black
Height	82,4 mm


Mounting height	71,4 mm
External diameter	77 mm
Cut-out size, round	63,4 mm
Cut-out size, metric	M63
Thread	M63 × 1,5
Thread length	11 mm
Clamping range	27 - 50 mm
Clamping range	1 x 27 - 50 mm

KEL-DPF 75|39-60 gy

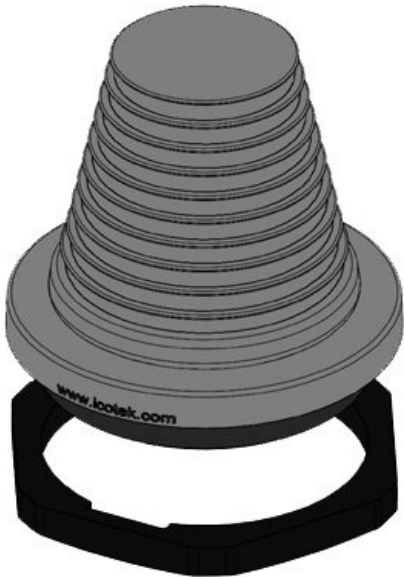

Part No.	42657	Mounting	71,4 mm
EAN	4251269316975	height	
Package quantity	1	External diameter	89 mm
For max. no. of cables	1	cut-out size, round	75,5 mm
Max. cable diameter	60 mm	cut-out size, metric	M75
Colour	grey (similar RAL 7035)	Thread	M75 × 1,5
Height	82,4 mm	Thread length	11 mm
		Clamping range	39 - 60 mm
		Clamping range	1 x 39 - 60 mm


KEL-DPF 75|39-60 bk




Part No.	50657
EAN	4251269317095
Package quantity	1
For max. no. of cables	1
Max. cable diameter	60 mm
Colour	black
Height	82,4 mm

Mounting height	71,4 mm
External diameter	89 mm
Cut-out size, round	75,5 mm
Cut-out size, metric	M75
Thread	M75 × 1,5
Thread length	11 mm
Clamping range	39 - 60 mm
Clamping range	1 x 39 - 60 mm

KEL-DPF 85|48-70 gy

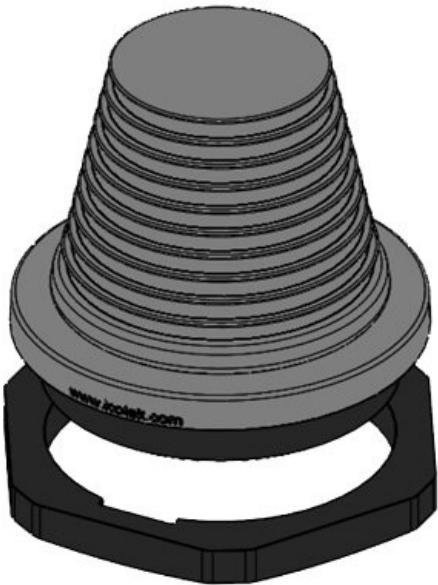

Part No.	42658	Mounting	71,4 mm
EAN	4251269316982	height	
Package quantity	1	External diameter	99 mm
For max. no. of cables	1	cut-out size, round	85,5 mm
Max. cable diameter	70 mm	cut-out size, metric	M85
Colour	grey (similar RAL 7035)	Thread length	14 mm
Height	85,4 mm	Clamping range	48 - 70 mm
		Clamping range	1 x 48 - 70 mm

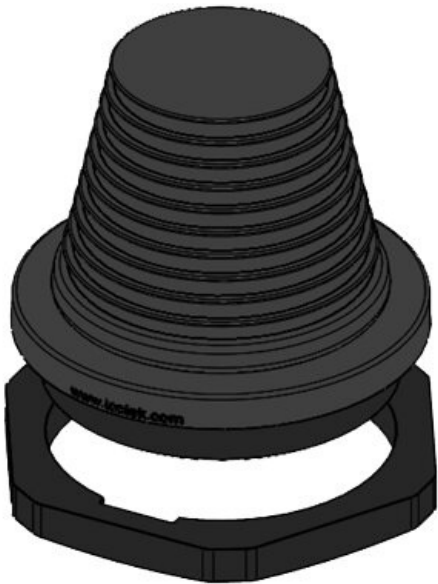

Part No.	50658	Mounting	71,4 mm
EAN	4251269317	height	
	101	External	99 mm
Package	1	diameter	
quantity		Cut-out size,	85,5 mm
For max. no. of	1	round	
cables		Cut-out size,	M85
Max. cable	70 mm	metric	
diameter		Thread length	14 mm
Colour	black	Clamping	48 - 70 mm
Height	85,4 mm	range	
		Clamping	1 x 48 - 70
		range	mm